
Turner & Townsend
Global office fit-out cost guide
Transforming spaces, unlocking value
Enter
We transform together.

Contents

Foreword 02

Global office fit-out costs 03

EMEA 03
Americas 05
APAC 07

Key drivers 09

Methodology 10

Spotlight location data 11

London 13
New York City 14
Singapore 15
Bangalore 16
Dubai and Abu Dhabi 17
Dublin 18
Hong Kong 19
Johannesburg 20
Munich 21
Paris 22
San Francisco 23
São Paulo 24
Seoul 25
Sydney 26
Tokyo 27
Toronto 28

Market intelligence 29

Key contacts 30



Foreword

By Nadia de Klerk, Global Head of Occupier

Making workspaces work harder

Occupiers are working harder than ever to drive value in office fit-out delivery and mitigate against an uncertain business outlook.

50 markets

16 spotlights

1,000+ datapoints



At Turner & Townsend we are passionate about making a difference to create a greener, more inclusive, productive world.

With working habits rapidly changing over the past five years, many occupiers have delayed major real estate investment decisions as they've taken time to assess the impact of hybrid working models on business performance.

Over the past 12 months, there's been a widespread renewal of occupier office fit-out activity across major markets, pointing to the conclusion of deliberations on smart working policies and stronger conviction from many businesses around longer-term office space requirements.

However, the path towards key occupational decisions is laden with twists and turns. Now, the latest economic shockwaves around US tariffs are likely to fuel a renewed sense of caution.

The momentum that the return-to-office requirement has gathered in many sectors is not likely to reverse. But the need to invest in workplaces so they can accommodate more staff on more days has come at a time when financial pressures and economic uncertainty are intensifying.

Given the competing forces of needing to save and invest simultaneously, the emphasis on driving maximum value from any capital investment programmes and making savvy, cost-effective office fit-out decisions has increased.

Data drives confidence to invest

Now more than ever, real estate teams must arm themselves with global data and insights to scan the market, benchmark against peers and make intelligent decisions. This will provide the foundation to see beyond short-term shocks and navigate emerging areas of risk.

Responding to this need, our global office fit-out cost guide for 2025 has drawn together data from 50 markets worldwide, so occupiers in every region can weigh up the average costs for different specifications – high, medium and low – creating workspaces to suit their needs, budget and cultural objectives.

Building upon our previous report, we've increased our market coverage with new locations, Hyderabad and Pune. This reflects the growing interest in these markets as cost-effective hubs, with India seeing record office investment levels last year. We've also added additional markets in the US including Miami, Dallas and Charlotte; as well as expanding to cover Perth and Brisbane in Australia – all hotspots for occupier investment.

To provide occupiers with detailed data to underpin targeted investment decisions, we've published a full dataset for 16 spotlight markets. For these spotlights, we've provided a full breakdown of elemental costs within each functional zone of a floorplate.

This unique approach gives occupiers average costs for walls and doors, ceiling finishes, services, IT and AV – enabling an understanding of the relative costs of investments in different zones to cater to activity-based working.

Taking a wide perspective

Our 2025 data shows an overall trend of increasing office fit-out costs across all regions over the last 18 months. The drivers for cost increases vary from market to market, but in almost all hub locations, deepening skilled labour shortages are a key catalyst for rising construction costs.

With few near-term solutions on the horizon to ease these labour issues, occupiers need to work with partners who can help them find diverse and innovative ways to save cost and drive long-term value, taking a portfolio-wide view.

Achieving business objectives while keeping costs under closer control requires occupiers to look both across and beyond their current portfolio. A wide, international perspective and consideration of the approaches taken by peers will help to identify new areas of opportunity.

An understanding of global demand patterns and construction dynamics in particularly hot markets will enable occupiers to better assess and select supply chain partners and choose the right contracting approach.

> **With an increasingly fragile geopolitical ecosystem, the ability to scan ahead for potential supply chain bottlenecks and plan to mitigate the impacts of these issues creates a major competitive advantage.**

Flight to quality

Quality over quantity is a key mantra for many occupiers, as they continue to invest in places and spaces that will be most impactful in terms of employee wellbeing and productivity.

Strategies vary from opening higher-quality office space in emerging lower-cost hubs, through to consolidated investment in flagship spaces, with pinpointed investments in the features and finishes that really matter to employees.

The key takeaway is that company budgets will remain under scrutiny for the foreseeable future, so no matter what the individual company strategy might be, intelligent data-led capital planning will be key to making sure the funds are available to make smart fit-out decisions at the right time.

By leveraging global data and insights, occupiers can build confidence in long-term planning, and make sure projects and portfolios are working hard to create value now and in the future.

The EMEA office fit-out cost landscape

London holding firm

London's place as a global financial hub has held firm, with office fit-out costs now the most expensive internationally at a high-spec average of US$5,932 per m² – coming in higher than New York for the first time.

London remains the investment focus for the majority of global occupiers within the UK. As well as rising fit-out costs and skilled labour pressures, high demand is causing an overall shortage of Grade A commercial office space in London.

In the City of London, availability for newly constructed, sustainable office buildings has fallen drastically, amid intense competition. The City is outperforming other boroughs from a leasing perspective, with circa eight percent rental growth anticipated in 2025.

Lack of capacity has put the brakes on what some feared was the beginning of an exodus of global firms from Canary Wharf. With notable exceptions, such as HSBC, who are moving to a new site in St Paul's, many companies have chosen to stay put, instead taking the opportunity to refurbish their workplaces to meet changing workforce and ESG needs.

Citigroup is reported to be investing over £1bn in a major refurbishment of its 42-floor owned and occupied Citi Tower in Canary Wharf, with sustainability a major factor in the decision to renovate rather than rebuild. Fintech start-up, Revolut, has also announced its commitment to a new global HQ in Canary Wharf, reflecting a drive to attract more start-ups and fast growth businesses to the district.

Confidence in the office market in London is underlined by ongoing development of high-rise space with recent developments such as 8 Bishopsgate being snapped up by occupiers on the basis of their strong sustainability credentials. In one of the largest openings of 2025, British Land is set to unveil 1 Broadgate, which is already fully let, again highlighting occupier appetite for premium space.

A cautious outlook across Europe

Most European office markets have benefitted from a gradually improving economic backdrop, with a relatively stable picture overall in hub markets. The trend towards portfolio downsizing to drive efficiency improvements is still playing out in some locations, with a cautious overall approach by most occupiers.

Across Europe, clients are looking for higher quality, more sustainable, state-of-the-art spaces in central, convenient locations. Traditional markets continue to be the most expensive in the region, with high-specification office fit-outs in Paris, Munich and Amsterdam costing upwards of US$4,000 per m², with Zurich topping the chart at over US$5,000.

Despite geopolitical instability, supply chains for materials and specialist equipment have proved resilient. The sector has adapted to a 'new normal' of disruption over the past five years and real estate teams are better set up to absorb sudden shocks, with the latest turbulence stemming from the volatility around US tariffs on European goods.

Across the EU, different markets are seeing varying patterns of demand. In Germany, the recessionary backdrop is affecting occupier confidence. Munich has experienced a demand wobble with vacancy rates the highest they have been since 2011. However, this has not caused a relative decrease in office fit-out costs, with Munich high-spec office fit-outs costing US$4,137 per m².

The rightsizing of office space for the economic environment is set to continue to play out in the medium term, but new sources of demand are emerging from AI-focused tech companies, with Germany home to the highest number of top performing start-ups in the EU.

> **Dublin has experienced some cooling in demand, however, there are emerging signs of resurgence. In Q4 2024, annual take-up rose 66 percent, signifying renewed occupier confidence with notable large transactions, such as Deloitte's new Irish HQ lease. At US$3,460, a high-spec fit-out in Dublin costs comparatively less than many other European capitals and the city continues to attract global businesses who see it as a gateway to the EU.**

Across Europe, the largest increases in overall demand are being seen in the financial and professional services sectors, but the exponential growth of data centres and continued strength in the life sciences sector are also providing alternate sources of demand. We are currently working with a leading global life sciences company, who are consolidating their office footprint across key central sites in Paris. This reflects a wider life sciences sector trend towards the colocation of office and lab space close to talent hubs.

New hubs in the Middle East

Competing demand from the tourism, hospitality and luxury residential sectors is nudging up office fit-out costs in the Middle East. However, costs remain attractively lower in relative terms, when compared to European capitals. The average premium office fit-out in Dubai and Abu Dhabi comes in at US$3,499 per m².

With the Kingdom of Saudi Arabia looking to cement its position as a global hub, we are seeing international businesses, which would traditionally have just one Middle Eastern regional office, expand their portfolios into the country.

Riyadh, which until recently was not on the map for many occupiers, is seeing a rising wave of demand, particularly from international firms involved in the delivery of the nation's giga programmes such as NEOM and Diriyah Gate. More than 600 companies have established regional headquarters in Saudi Arabia since the government's Saudi regional HQ programme was launched four years ago.

> **Keeping pace with this rising international appetite is proving a challenge. Both Dubai and Riyadh are struggling with a shortage of readily available high specification office space. In Riyadh, a significant wave of new Grade A office space is due to be delivered by the end of 2025 to help satiate demand. Due to fierce competition for labour and materials from the giga programmes, a high-spec office fit-out costs an average of more than US$350 per m² more in Riyadh (US$3,864 per m²) when compared to Dubai/Abu Dhabi (US$3,498 per m²).**

Young talent and lower costs drive interest in Africa

A strong pool of young talent and comparatively low operating and build costs continues to fuel growth in the occupier sector in key hubs across Africa, despite economic headwinds.

> **Office fit-out costs in Africa remain low by a global standard; the average cost of a premium office fit-out in Nairobi (US$1,329 per m²) is around 25 percent of that found for the same quality space in Western markets. Growth in specific sectors, particularly tech, energy and banking, is helping to keep demand for premium space steady. Google, for example, has recently celebrated the opening of a LEED Platinum certified office in Nairobi, housing product development experts.**

General construction labour remains largely oversupplied across key markets, helping to keep costs low. Even in South Africa, the most expensive African office fit-out region, the average price of a high-specification office fit-out stands at US$1,864 per m².


However, with the expansion of the industrial and data centre markets, there is increasing demand being placed upon a smaller pool of specialist technical experts, especially in West Africa, which may push costs up over time.

The EMEA office fit-out cost landscape

UK and Europe - ft² | UK and Europe -m² | Africa and Middle East - ft² | Africa and Middle East - m²

UK and Europe

Total US$/ft² (low, medium and high specification)

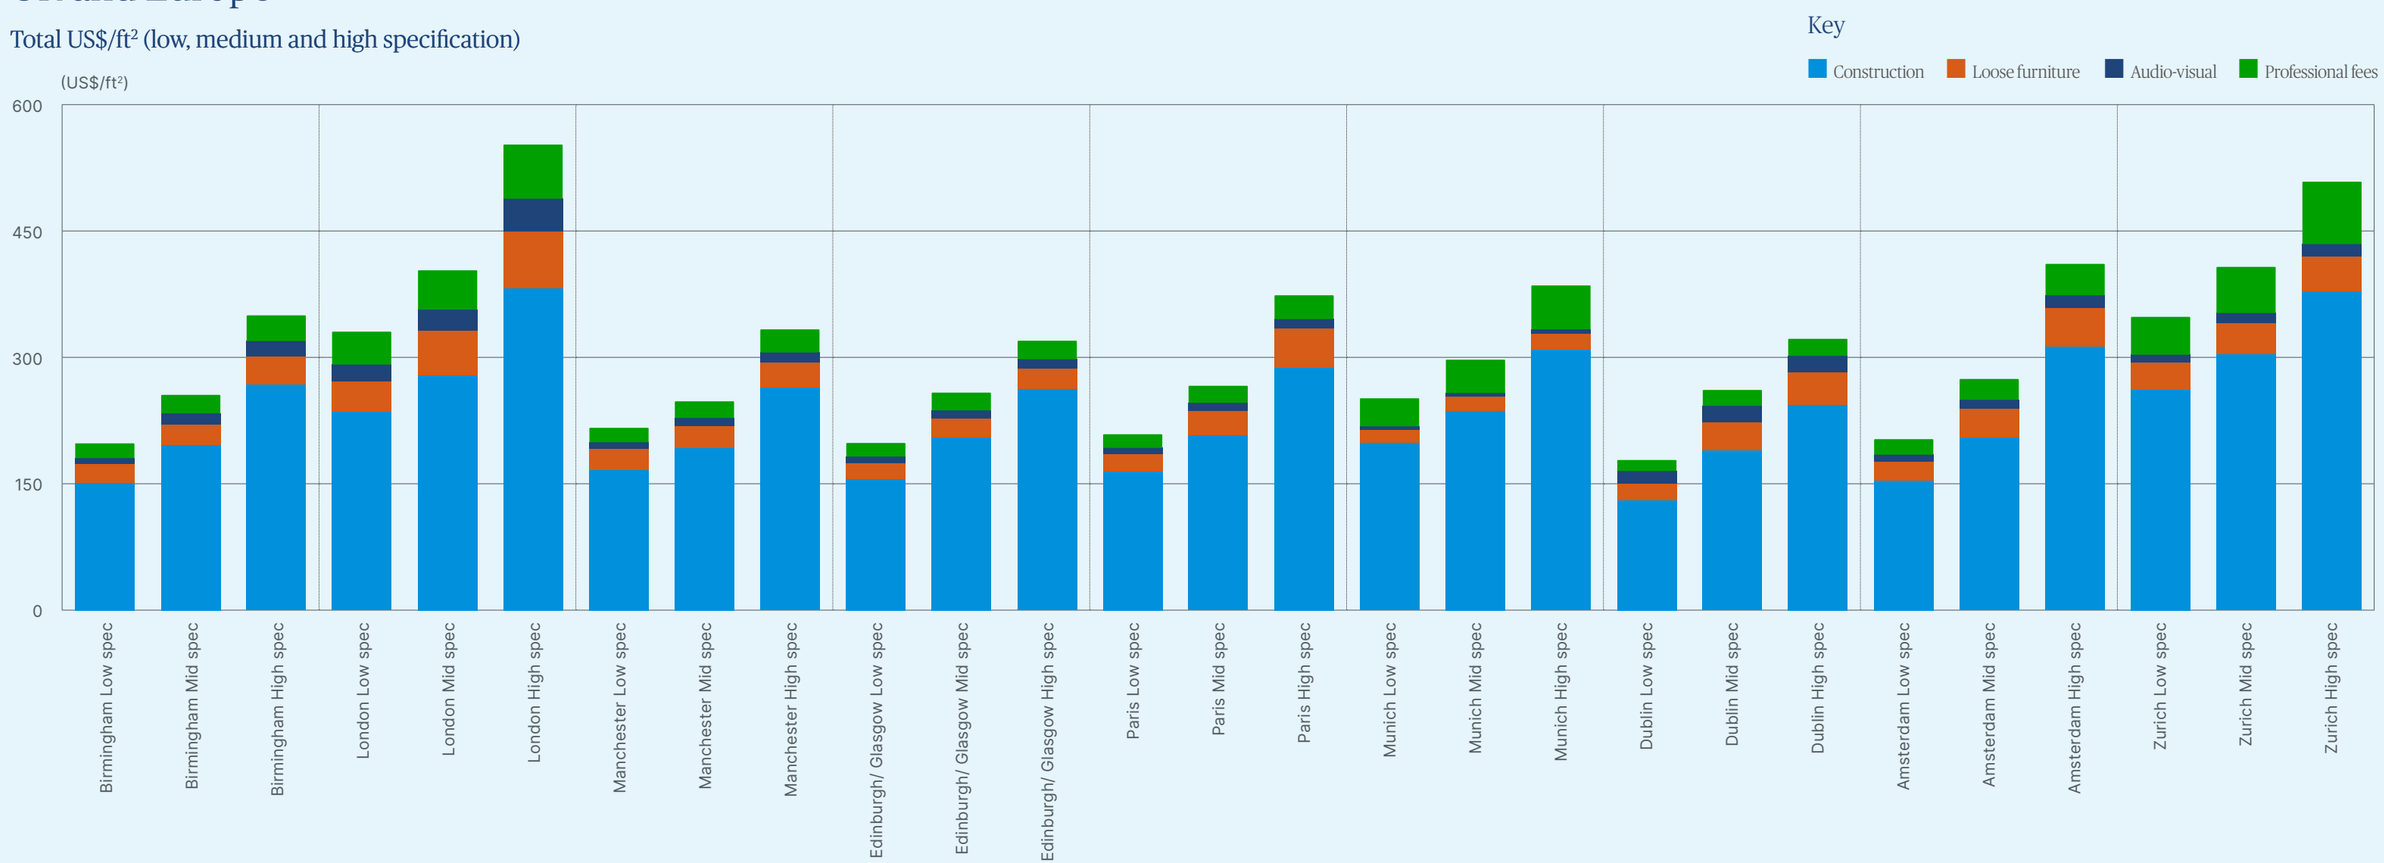

The EMEA office fit-out cost landscape

		Total Cost			Construction			Loose Furniture			Audio-Visual			Professional Fees		
Country	**Market**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**
Kenya	Nairobi	$58.87	$86.33	$123.43	49.93	72.67	104.08	4.36	6.59	9.54	0.82	1.57	1.95	3.76	5.49	7.85
South Africa	Johannesburg	$102.51	$118.36	$173.19	79.59	91.74	126.76	5.65	6.76	9.20	8.94	10.22	23.83	8.34	9.64	13.40
France	Paris	$208.47	$265.77	$372.87	164.52	207.33	286.92	20.49	29.26	46.82	7.33	8.78	10.73	16.14	20.39	28.39
Germany	Munich	$250.95	$296.62	$384.34	198.51	235.83	308.69	15.71	17.41	19.12	3.51	3.90	4.88	33.22	39.48	51.66
Ireland	Dublin	$178.03	$260.67	$321.43	130.85	189.64	243.01	19.51	33.17	38.82	14.63	19.02	19.31	13.04	18.84	20.28
Netherlands	Amsterdam	$202.56	$273.71	$410.08	153.73	204.77	312.34	21.95	34.14	46.34	8.29	10.24	13.95	18.59	24.56	37.46
Switzerland	Zurich	$347.43	$406.28	$507.22	261.64	303.54	377.63	31.22	36.09	40.97	9.75	12.19	14.63	44.82	54.45	73.99
Saudi Arabia	Riyadh	$195.08	$271.23	$359.02	142.77	189.88	244.04	24.08	33.86	50.17	10.79	25.46	37.63	17.44	22.02	27.18
UAE	Dubai & Abu Dhabi	$173.73	$242.60	$325.05	127.06	164.72	225.79	25.08	37.63	45.15	6.27	21.08	28.52	15.31	19.17	25.59
England	Birmingham	$197.40	$255.07	$349.06	151.07	196.09	267.59	22.42	24.19	32.45	6.56	12.64	18.72	17.35	22.15	30.31
England	London	$329.83	$402.26	$551.10	235.32	278.02	381.93	35.40	53.09	70.79	20.06	24.78	34.22	39.06	46.37	64.16
England	Manchester	$216.07	$247.34	$332.37	166.42	191.57	263.75	24.78	26.55	29.50	7.67	9.44	11.80	17.21	19.79	27.33
Scotland	Edinburgh/Glasgow	$198.22	$257.77	$319.16	155.19	204.28	262.17	19.10	23.01	23.60	7.74	9.44	11.21	16.19	21.04	22.18

The Americas' office fit-out cost landscape

An improving but fragile picture in the US

Office fit-out costs in New York and San Francisco continue to outpace the rest of North America at well above US$5,000 per m^2 for a high-spec office fit-out, as the drive for quality over quantity continues to play out.

The shift back to the office for many workers, particularly in sectors like professional and financial services, is being accompanied by a continued focus on making workspaces attractive for employees with better amenities and more collaboration spaces.

> **Many large US corporates are looking to consolidate portfolios, with single, larger campuses and higher-spec headquarters rather than multiple, smaller offices. As well as the traditional East and West Coast hubs, Houston and Dallas remain popular HQ locations, driven by energy sector investment. Houston's high-specification office fit-out cost averages US$3,654 per m^2.**

New York continues to reign supreme as a global financial and professional services hub. Manhattan's office sector, as a whole, has now recovered to its pre-pandemic leasing levels. Grand Central, the Plaza, Park Avenue, Fifth/Madison Avenue and Sixth Avenue/Rockefeller Center are the five core submarkets driving the resurgence, which is testament to the continued appeal of offices close to transportation nodes offering high-quality spaces and amenities.

The San Francisco office market is showing signs of stabilising, having been weighed down by the rise of remote work, tech-industry turbulence and wider social issues in the city. Although the San Francisco office sector closed Q4 with an overall vacancy rate of 36.5 percent, the end of 2024 marked the first time in nearly five years that more space was leased than vacated.

San Francisco's burgeoning artificial intelligence sector is a bright spot for the local economy, with fresh demand from companies such as OpenAI, Anthropic and Databricks. Overall, AI companies signed 90 leases last year, up from 36 in 2023. In general, start-ups are looking for short leases of three years or less, giving them flexibility as they scale. This means they want fast-paced office fit-outs with high-quality but reversible features, to give them the agility to move on.

Los Angeles has seen a greater level of bid price escalation since 2024 (5% compared with the National Average of 3.2%), driven by the supply chain disruption and construction demand following the wildfire disasters in the surrounding area. Higher bid price escalation of 4% was also seen in other key growth markets of Tampa, Phoenix, Miami and Houston.

The improving overall trajectory may yet be derailed by the dynamic political situation, with tariff decisions playing out. US occupiers are facing another period of disruption and uncertainty, which will influence capital planning decisions in 2025 and could reduce office demand, should the economy falter.

Canada weighed down by uncertainty

In Canada, political and economic uncertainty is weighing down the office market. With the election result now decided, there may be a renewed sense of confidence from Canadian occupiers as policies crystallise.

Despite vacancy rates still creeping up, Q4 2024 was Downtown Toronto's best quarter for office leasing in three years. There is a general downsizing trend, but this is generating office fit-out activity to create smarter spaces that provide the quality employees expect, with targeted investment in acoustics, ergonomic furniture and improved AV technology.

Canada remains a relatively cheaper market than the US for office fit-out – and the most expensive market (Vancouver – US$3,351 per m^2 for premium office space) is comparable to New York City's lower-specification costs (US$3,582).

The thriving tech and data centre markets in both the US and Canada, and consequential demand for specialist mechanical, electrical and plumbing (MEP) materials and skills is having a knock-on effect on overall office fit-out costs, especially for higher-specification projects.

Given the pressure on the supply chains, some clients are looking to mitigate this by bundling MEP work together across multiple projects to maximise the use of specialist skills.

Emerging hotspots in Latin America

Latin America's office fit-out costs are generally lower than those of its northern neighbours. However, it does have its more expensive markets such as Buenos Aires, Montevideo and Santiago (on average US$3,676, US$3,401 and US$3,460 per m^2, respectively, for high-specification office fit-outs).

Fluctuating costs across the Latin American market are being driven by a mix of factors including volatile currencies and high demand in fast-expanding economies. Price rises are also being exacerbated by a shortage of skilled labour to meet with demand, particularly in specialist areas services like sustainability and MEP.

The region is a tale of two types of market. In hotspots like Mexico, recent growth of the industrial and logistics sectors due to nearshoring trends, and accelerating tech and financial sectors, are causing high demand for high-specification, modern, flexible workspaces. Brazil and Colombia are both seeing strong growth, driven by investment in the technology, financial services and healthcare sectors.

Conversely, some markets such as Argentina and Chile are experiencing the impact of political volatility, instability and slower economic growth. This is causing a cooling demand for office fit-out in these less stable markets. Despite this cooling, higher prices persist, as greater levels of risk are baked-in to project costs.


Like in North America, there has been a region-wide shift towards hybrid working. This is seeing companies opt for smaller, more flexible spaces and satellite offices as they push for adaptable spaces that can better suit the mix of remote and in-office working.

The Americas' office fit-out cost landscape

North America - ft² | North America - m² | Latin America - ft² | Latin America - m²

North America

Total US$/ft² (low, medium and high specification)

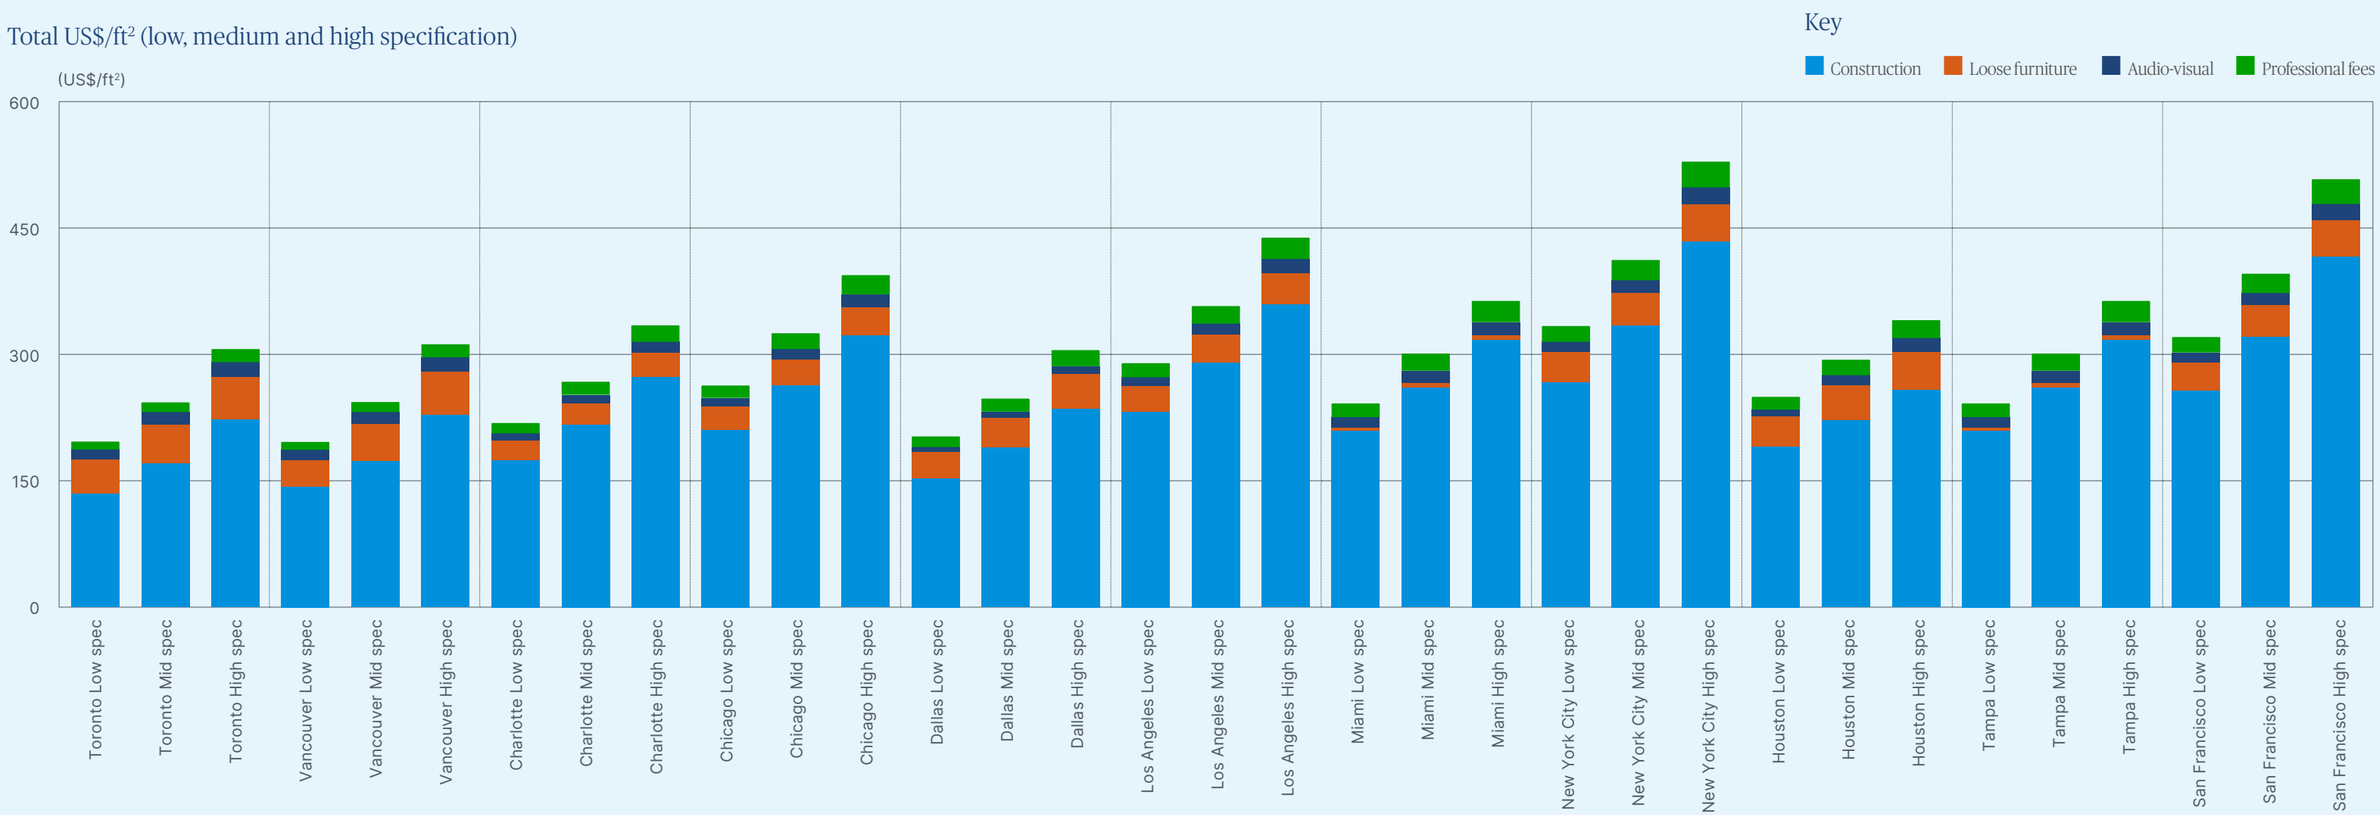

The Americas' office fit-out cost landscape

		Total Cost			Construction			Loose Furniture			Audio-Visual			Professional Fees		
Country	**Market**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**
Canada	Toronto	$195.97	$242.63	$305.30	135.18	170.93	222.94	39.89	45.07	49.65	11.64	14.94	17.38	9.26	11.70	15.32
Canada	Vancouver	$195.85	$242.71	$311.28	142.59	173.63	228.23	31.49	42.99	50.97	12.11	14.31	16.54	9.67	11.78	15.55
USA	Charlotte	$218.21	$266.88	$333.45	174.07	215.93	272.73	23.67	25.73	28.60	8.12	9.91	12.78	12.34	15.30	19.34
USA	Chicago	$262.50	$324.05	$393.04	210.02	262.77	322.01	27.99	30.79	33.31	9.60	11.86	14.88	14.90	18.63	22.84
USA	Dallas	$202.10	$246.82	$304.47	153.55	189.42	235.08	30.21	35.02	41.38	5.91	7.00	8.80	12.43	15.37	19.21
USA	Los Angeles	$288.64	$356.21	$437.41	231.47	289.45	358.85	30.35	33.38	36.71	10.40	12.86	16.40	16.42	20.52	25.45
USA	Miami	$241.24	$300.21	$362.39	208.70	260.30	316.31	4.03	5.48	5.93	12.39	14.16	14.90	16.13	20.26	25.24
USA	New York City	$332.79	$410.70	$527.37	266.87	333.73	432.65	34.99	38.49	44.26	12.00	14.83	19.77	18.93	23.66	30.69
USA	Houston	$249.08	$292.80	$339.46	189.81	222.28	257.83	36.59	40.38	44.41	7.32	12.11	16.15	15.36	18.03	21.07
USA	Tampa	$241.24	$300.21	$362.39	208.81	260.41	316.39	4.00	5.45	5.91	12.29	14.07	14.85	16.14	20.27	25.25
USA	San Francisco	$319.61	$394.44	$506.48	256.30	320.51	415.52	33.60	36.96	42.51	11.52	14.24	18.99	18.18	22.72	29.47
Brazil	Sao Paulo	$120.83	$152.77	$230.25	89.69	113.33	169.78	14.23	20.09	36.83	13.31	14.85	15.54	3.60	4.50	8.11
Mexico	Mexico city	$162.07	$194.97	$242.95	124.46	150.12	185.55	18.21	22.76	31.87	10.01	11.84	12.75	9.38	10.25	12.79
Columbia	Bogota	$101.70	$115.87	$154.79	73.64	81.11	108.51	15.33	20.75	29.04	7.15	7.87	8.94	5.57	6.14	8.30
Argentina	Buenos Aires	$195.10	$262.94	$341.53	132.05	160.46	195.06	33.66	62.28	96.57	19.77	28.55	35.88	9.61	11.64	14.02
Uruguay	Montevideo	$178.87	$230.97	$315.94	122.72	141.24	180.74	28.85	54.49	89.10	18.38	25.00	33.12	8.92	10.25	12.98
Chile	Santiago	$185.89	$245.61	$321.49	125.36	147.59	181.19	32.30	59.76	92.67	18.98	27.40	34.43	9.26	10.85	13.20

The APAC office fit-out cost landscape

A mixed picture across Asia

In Japan, the trend for occupiers to upgrade their office environments to attract and retain employees has continued over the past 12 months, pushing up office rents and driving new fit-out activity in all major cities. Tokyo remains one of the most expensive cities in the world for construction because limited competition in the contractor market keeps costs high. Fitting out high-specification commercial office space comes at a high average of US$4,619 per m^2 – comparable to Sydney and Los Angeles.

Singapore saw an improvement in office take-up and occupancy in Q4 2024, which bodes well for the office fit-out market in 2025. Upcoming lease expiries and low precommitment levels for new offices are potential concerns, but overall, the flight to quality is set to continue, driving demand for high-spec office fit-outs in the central business district.

> **In a notable trend, Tokyo and Singapore are both emerging as global leaders for sustainable office space, with more than 80 percent of new developments green certified.**

Hong Kong has a relatively high average cost US$4,575 per m^2 for premium office space, but this market is still struggling with weakened demand. 2024 was a challenging year for Hong Kong's office market, with oversupply and increasing vacancy rates. In 2025, new economic stimulus policies signalled by the Chinese government may lead to increased IPO activities in Hong Kong. This could bolster growth in the financial sector, driving a fresh wave of office fit-out demand for banking clients.

With traditional hubs demanding high office fit-out costs, global companies continue to find value in Asia's emerging markets. In Bangalore, for example, low-specification office fit-outs are particularly cost effective at an average of just US$531 per m^2.

India's office market saw record leasing activity in 2024. The type of roles being concentrated in India have been gradually changing, as global employers reap the benefits of a well-educated workforce and low operating costs. A growing number of occupiers are now developing higher-quality space locally to help attract and retain talent, as competition rises.

Global capability centres for international corporates continue to drive demand across key hubs in India. Some specialist materials and finishes are seeing price escalation, exacerbated by a spike in shipping costs which is specifically impacting international firms with strict guidelines around furniture and finishings across their global portfolios.

Australia and New Zealand on the rebound

Australia has been through a difficult few years economically, contending with stubborn inflation. However, signs of resurgence are now appearing. In Q4 2024, the economy expanded at the fastest pace in two years, which should serve to boost occupier confidence in 2025.

The occupier landscape is going through a period of change across the Australian and New Zealand markets. Companies are needing to balance the drive to bring employees back to the office with keeping close control of costs.

Many occupiers are carefully reviewing their portfolio requirements. New drivers are having a clear impact on how projects are delivered, with contractors and designers needing to optimise existing assets. There is an increased focus on re-use of furniture and the extension of office fit-outs beyond originally planned lifecycles, to drive sustainability goals.

Premium office space remains a valuable commodity across all markets in the region, reflecting increased employee expectations for attractive and amenity-rich spaces. In Sydney, the average cost of a high-end office fit-out is US$4,756 per m^2 and, in Brisbane, US$4,415 per m^2.

> **Due to Grade A shortages, asset owners are now also considering how to reposition medium specification, or Grade B, stock to better appeal to tenants and their employees.**

Supply chain pressures have eased significantly in most markets, and occupiers are now enjoying a greater degree of confidence in shorter lead-in times for most materials. That said, a notable rise in supplier insolvencies and companies with major financial difficulties mean greater focus is being placed on procuring financially stable suppliers.




The APAC office fit-out cost landscape

Asia - ft² | Asia - m² | Australia and New Zealand - ft² | Australia and New Zealand - m²

Asia

Total US$/ft² (low, medium and high specification)

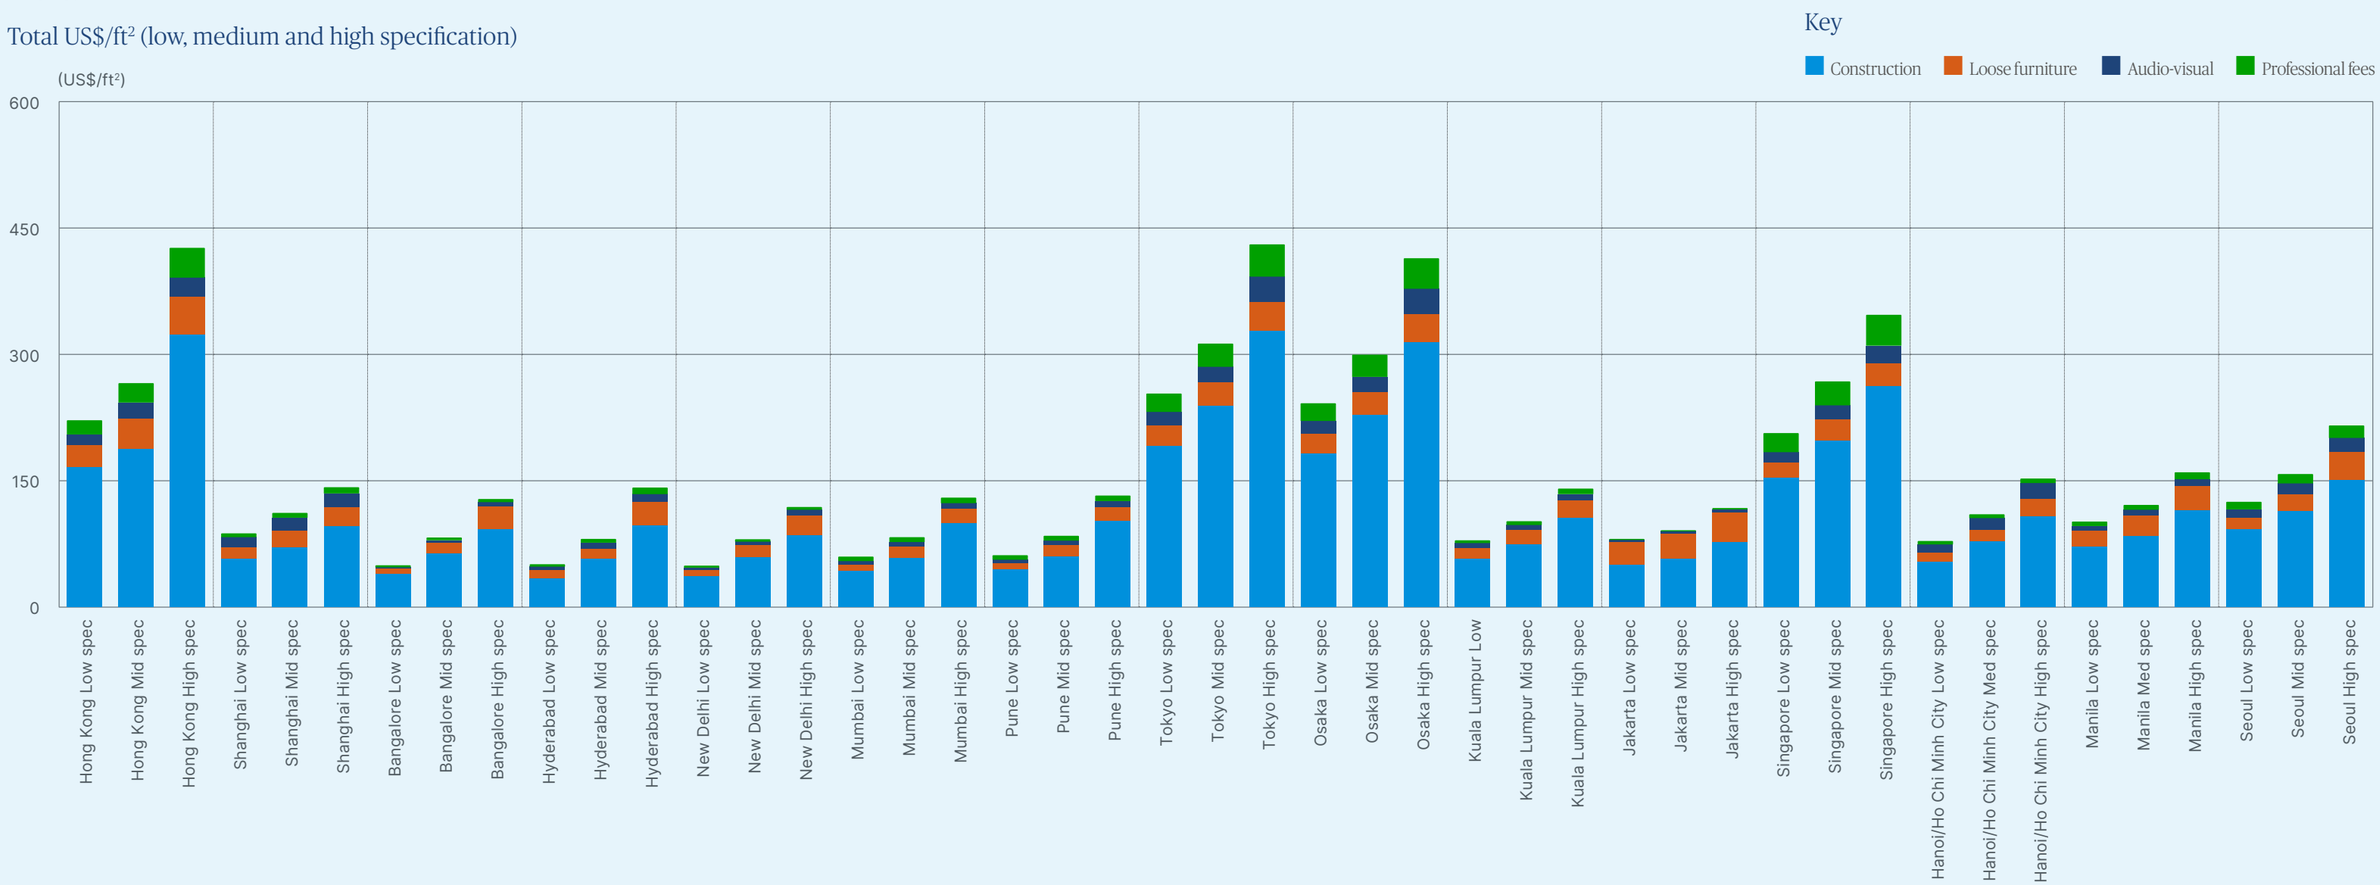

The APAC office fit-out cost landscape

		Total Cost			Construction			Loose Furniture			Audio-Visual			Professional Fees		
Country	**Market**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**	**Low**	**Medium**	**High**
China	Hong Kong	$220.92	$265.09	$425.03	165.53	187.37	322.26	26.57	36.23	44.69	12.08	18.12	22.95	16.75	23.37	35.14
China	Shanghai	$87.21	$111.22	$141.84	57.28	70.73	96.11	13.01	19.51	22.11	12.36	15.43	16.08	4.57	5.54	7.55
India	Bangalore	$49.32	$82.05	$127.85	39.16	63.12	91.94	5.88	13.20	27.36	1.74	2.65	4.81	2.55	3.09	3.75
India	Hyderabad	$50.39	$80.55	$141.24	34.44	57.39	96.89	9.00	12.00	27.60	4.20	6.60	9.00	2.75	4.57	7.75
India	New Delhi	$48.97	$80.14	$118.42	36.55	58.85	84.85	7.25	14.49	23.41	2.79	3.90	6.69	2.39	2.89	3.46
India	Mumbai	$59.38	$82.40	$129.29	43.10	58.52	99.31	7.25	13.94	16.72	3.90	4.46	6.69	5.13	5.48	6.57
India	Pune	$61.09	$84.06	$131.96	44.63	59.74	101.81	7.25	13.94	16.72	3.90	4.79	6.69	5.32	5.59	6.74
Japan	Tokyo	$252.70	$311.83	$429.10	190.74	238.32	326.97	24.53	27.59	33.72	15.33	18.19	30.32	22.11	27.73	38.09
Japan	Osaka	$241.25	$298.65	$412.93	181.37	227.47	313.61	23.91	26.98	33.11	14.96	17.77	29.71	21.00	26.44	36.50
Malaysia	Kuala Lumpur	$78.98	$101.62	$140.18	57.50	74.21	105.87	12.26	16.35	20.44	5.72	6.54	7.36	3.50	4.52	6.51
Indonesia	Jakarta	$80.59	$90.93	$116.99	50.42	57.39	76.90	26.34	29.26	35.12	2.63	2.93	3.22	1.21	1.35	1.75
Singapore	Singapore	$205.67	$266.95	$345.78	153.71	197.51	261.15	17.19	24.06	27.50	12.37	17.19	20.62	22.40	28.18	36.50
Vietnam	Hanoi/Ho Chi Minh	$77.90	$109.78	$151.91	53.59	77.58	107.74	11.08	13.84	20.30	9.26	13.89	18.52	3.98	4.46	5.34
Philippines	Manila	$100.90	$120.89	$159.38	71.69	84.26	114.09	18.58	24.15	29.73	5.57	6.50	7.43	5.06	5.97	8.12
Korea	Seoul	$124.64	$157.33	$214.67	92.37	113.29	150.56	13.19	19.79	32.98	9.89	13.05	16.31	9.18	11.20	14.82
Australia	Brisbane	$186.11	$270.79	$410.13	147.14	212.75	318.29	14.86	22.59	35.67	11.89	17.84	23.78	12.22	17.60	32.38
Australia	Melbourne	$182.07	$238.67	$373.01	139.61	181.19	285.51	17.84	23.78	29.73	14.86	17.84	32.70	9.76	15.86	25.07
Australia	Sydney	$186.33	$268.72	$441.82	151.88	210.66	345.52	11.89	20.81	26.76	5.95	14.86	32.70	16.62	22.38	36.84
Australia	Perth	$177.39	$236.52	$356.22	144.21	193.02	296.71	11.89	16.65	20.81	8.92	10.29	13.23	12.37	16.56	25.48
New Zealand	Auckland	$139.34	$163.92	$208.11	116.11	133.29	167.67	11.32	16.70	22.09	2.16	3.23	4.85	9.76	10.70	13.50

Key drivers

We have produced a global office fit-out cost guide that provides you with insight on how costs are established and what they are based on.

Our dataset allows you the flexibility to take core functional cost areas and build up your own capital expenditure budget.

The report examines 50 cities globally, identifying the CAT A and CAT B construction costs for a high, medium and low specification. Further to this, 16 spotlight cities have been examined in a greater functional and elemental split.

Click here

Opening office in a new market: our key recommendations

1

Establish a robust location selection criterion that assesses, but is not limited to:

- Availability of real estate
- Financial elements such as wages and tax
- Geopolitical risks
- Supply and demand of talent
- Attractiveness to local workforce
- Talent elements such as supply, demand and regulations

2

Select a delivery partner who can bridge the gap between a local delivery approach and an approach you are familiar with.

3


Access global benchmark and supply chain data to understand costs, typical procurement routes and other key local market factors.

4

Embrace local products and standards where appropriate – saving on lead-in times, costs and carbon footprint.



Methodology

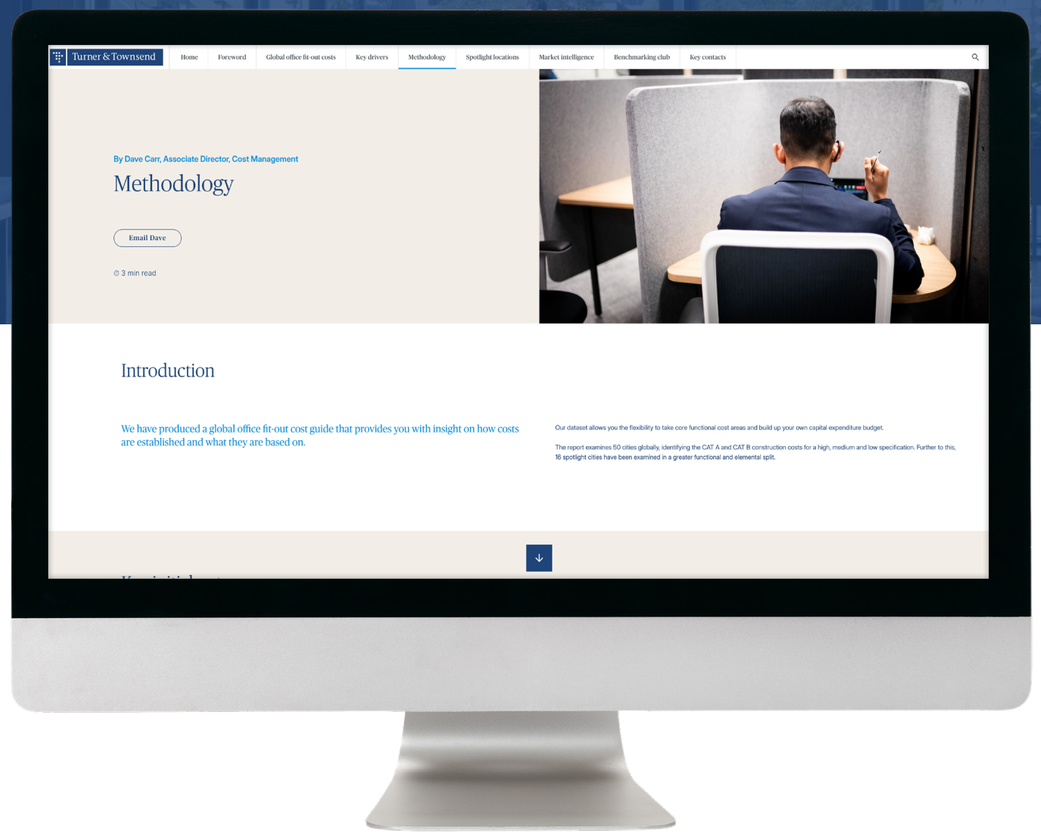

Global office fit-out cost guide

Transforming spaces, unlocking value

We have produced a global office fit-out cost guide that provides you with insight on how costs are established and what they are based on.

Our dataset allows you the flexibility to take core functional cost areas and build up your own capital expenditure budget.


The report examines 50 cities globally, identifying the CAT A and CAT B construction costs for a high, medium and low specification. Further to this, 16 spotlight cities have been examined in a greater functional and elemental split.

Click here

Spotlight locations



London



New York




Singapore



Bangalore



Dubai and
Abu Dhabi



Dublin




Hong Kong



Johannesburg



Munich



Paris




San Francisco




São Paulo



Seoul



Sydney



Tokyo



Toronto

Floorplate

LEVEL 04



LEVEL 05



Key

- Boardroom
- Business / Welcome lounge
- Collaboration
- Comms / IT build and store / Copy print / Lockers / Store
- Contemplation / Parents room
- Executive suite
- Meeting rooms
- Open plan
- Quiet rooms
- Staff breakout / Dining / Tea point
- Training facilities
- WCs

Spotlight location data: London US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	13.61	-
Walls and doors	7.56	2.36	-	186.56	105.12	49.79	71.68	9.83	18.01	45.42	0.74	-
Wall finishes	0.74	1.06	-	42.95	23.02	4.96	0.84	3.61	14.19	20.82	0.41	3.99
Floor finishes	20.00	20.19	-	17.14	15.76	15.88	16.67	16.82	15.78	19.12	15.81	18.28
Ceiling finishes	8.85	8.85	-	24.29	10.54	23.60	23.60	8.85	23.60	8.85	25.04	23.60
Fittings, furnishings and equipment	7.99	75.35	1.36	-	1.22	0.87	2.68	2.36	2.62	28.14	0.25	76.02
Services	129.79	129.79	129.79	129.79	129.79	129.79	129.79	129.79	129.79	275.87	129.79	129.79
IT and AV	12.98	12.98	12.98	12.98	12.98	12.98	12.98	12.98	12.98	12.98	12.98	12.98
Preliminaries, overhead and profit	10.96	14.72	8.33	24.50	17.59	13.95	15.18	10.74	12.70	24.35	11.60	15.56
Sub-total construction	**198.86**	**265.29**	**152.45**	**438.20**	**316.02**	**251.83**	**273.41**	**194.97**	**229.67**	**435.55**	**210.21**	**280.22**
Loose furniture	35.40	35.40	35.40	35.40	35.40	35.40	35.40	35.40	35.40	35.40	35.40	35.40
Audio-visual	20.06	20.06	20.06	20.06	20.06	20.06	20.06	20.06	20.06	20.06	20.06	20.06
Professional fees	39.06	39.06	39.06	39.06	39.06	39.06	39.06	39.06	39.06	39.06	39.06	39.06
Sub-total client direct	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**	**94.51**
Total	**293.37**	**359.80**	**246.96**	**532.72**	**410.53**	**346.34**	**367.92**	**289.49**	**324.18**	**530.07**	**304.72**	**374.73**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	14.18	-
Walls and doors	8.53	2.66	-	223.91	129.41	64.46	90.95	14.99	21.30	139.48	0.83	-
Wall finishes	11.30	1.06	-	68.72	36.84	7.94	0.84	3.61	22.71	63.46	0.41	3.99
Floor finishes	35.63	35.82	-	20.91	19.43	19.55	17.28	17.43	19.45	31.61	16.46	19.13
Ceiling finishes	16.22	8.85	-	46.32	15.99	34.80	43.43	23.60	36.91	8.85	25.04	23.60
Fittings, furnishings and equipment	11.69	101.15	1.36	59.60	1.44	1.03	19.42	26.85	2.76	41.88	3.60	98.77
Services	147.48	147.48	147.48	147.48	147.48	147.48	147.48	147.48	147.48	330.23	147.48	147.48
IT and AV	14.51	14.51	14.51	14.51	14.51	14.51	14.51	14.51	14.51	14.51	14.51	14.51
Preliminaries, overhead and profit	13.15	16.79	8.64	31.64	19.74	15.59	18.02	13.32	14.24	34.31	11.89	16.57
Sub-total construction	**258.52**	**328.33**	**171.99**	**613.08**	**384.83**	**305.37**	**351.94**	**261.81**	**279.36**	**664.32**	**234.40**	**324.06**
Loose furniture	53.09	53.09	53.09	53.09	53.09	53.09	53.09	53.09	53.09	53.09	53.09	53.09
Audio-visual	24.78	24.78	24.78	24.78	24.78	24.78	24.78	24.78	24.78	24.78	24.78	24.78
Professional fees	46.37	46.37	46.37	46.37	46.37	46.37	46.37	46.37	46.37	46.37	46.37	46.37
Sub-total client direct	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**	**124.24**
Total	**382.76**	**452.57**	**296.23**	**737.32**	**509.07**	**429.61**	**476.18**	**386.05**	**403.60**	**788.55**	**358.64**	**448.30**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	15.04	-
Walls and doors	10.24	3.19	-	263.49	150.15	73.68	105.70	18.46	24.01	80.09	0.99	-
Wall finishes	34.02	52.50	-	175.58	94.13	20.29	34.38	4.52	65.20	106.75	4.93	4.99
Floor finishes	46.41	54.58	-	28.45	26.53	26.68	22.06	25.61	26.55	39.89	21.06	23.40
Ceiling finishes	122.25	23.60	-	81.98	35.58	79.64	79.64	122.25	79.64	8.85	58.84	34.42
Fittings, furnishings and equipment	30.64	153.47	1.36	147.48	1.70	1.22	43.98	250.56	2.93	61.43	18.71	117.63
Services	171.16	171.16	171.16	171.16	171.16	171.16	171.16	171.16	171.16	460.73	171.16	171.16
IT and AV	16.70	16.70	16.70	16.70	16.70	16.70	16.70	16.70	16.70	16.70	16.70	16.70
Preliminaries, overhead and profit	21.19	23.38	9.08	43.86	24.41	19.08	23.30	30.08	18.93	38.34	14.99	18.03
Sub-total construction	**452.61**	**498.57**	**198.29**	**928.70**	**520.35**	**408.45**	**496.91**	**639.34**	**405.11**	**812.78**	**322.41**	**386.32**
Loose furniture	70.79	70.79	70.79	70.79	70.79	70.79	70.79	70.79	70.79	70.79	70.79	70.79
Audio-visual	34.22	34.22	34.22	34.22	34.22	34.22	34.22	34.22	34.22	34.22	34.22	34.22
Professional fees	64.16	64.16	64.16	64.16	64.16	64.16	64.16	64.16	64.16	64.16	64.16	64.16
Sub-total client direct	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**	**169.17**
Total	**621.77**	**667.74**	**367.46**	**1,097.87**	**689.52**	**577.62**	**666.08**	**808.51**	**574.28**	**981.95**	**491.58**	**555.49**

Spotlight location data: New York City US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	23	-
Millwork	26	42	-	24	11	7	13	28	15	14	1	24
Architectural metal and glass	-	-	2	125	70	38	60	-	2	31	0	-
Ceiling, carpentry, partitions and wall covering	37	30	-	186	95	57	51	32	80	35	44	48
Access floors and finishes	33	33	-	25	24	24	24	24	24	49	25	26
Appliances and toilet accessories	2	19	-	-	0	0	1	1	0	188	0	17
Services	106	106	106	106	106	106	106	106	106	248	106	106
Data & security	15	15	15	15	15	15	15	15	15	15	15	15
General conditions, fee and insurance	25	28	14	55	37	28	31	23	28	66	24	27
Sub-total construction	**243**	**273**	**136**	**535**	**357**	**275**	**299**	**229**	**270**	**646**	**239**	**263**
Loose furniture	35	35	35	35	35	35	35	35	35	35	35	35
Audio-visual	12	12	12	12	12	12	12	12	12	12	12	12
Professional fees	19	19	19	19	19	19	19	19	19	19	19	19
Sub-total client direct	**66**	**66**	**66**	**66**	**66**	**66**	**66**	**66**	**66**	**66**	**66**	**66**
Total	**309**	**338**	**202**	**601**	**423**	**341**	**365**	**295**	**336**	**712**	**305**	**329**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	24	-
Millwork	15	59	-	65	12	8	26	55	17	18	4	31
Architectural metal and glass	-	-	2	133	76	43	66	-	2	33	0	-
Ceiling, carpentry, partitions and wall covering	92	37	-	229	117	60	63	60	92	105	55	61
Access floors and finishes	67	67	-	28	27	27	26	26	27	54	28	28
Appliances and toilet accessories	3	19	-	-	0	0	1	1	0	206	0	17
Services	137	137	137	137	137	137	137	137	137	330	137	137
Data & security	17	17	17	17	17	17	17	17	17	17	17	17
General conditions, fee and insurance	38	38	17	70	44	33	38	33	33	87	30	33
Sub-total construction	**368**	**374**	**173**	**678**	**430**	**327**	**373**	**329**	**325**	**850**	**295**	**324**
Loose furniture	38	38	38	38	38	38	38	38	38	38	38	38
Audio-visual	15	15	15	15	15	15	15	15	15	15	15	15
Professional fees	24	24	24	24	24	24	24	24	24	24	24	24
Sub-total client direct	**77**	**77**	**77**	**77**	**77**	**77**	**77**	**77**	**77**	**77**	**77**	**77**
Total	**445**	**451**	**250**	**755**	**507**	**404**	**450**	**406**	**402**	**927**	**372**	**401**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	26	-
Millwork	39	69	-	75	14	9	29	357	19	20	21	35
Architectural metal and glass	-	-	2	151	91	55	80	-	2	58	0	-
Ceiling, carpentry, partitions and wall covering	141	141	-	247	129	55	65	82	95	202	93	94
Access floors and finishes	72	84	-	40	39	39	34	37	39	56	36	36
Appliances and toilet accessories	3	28	-	-	0	0	1	1	0	225	0	26
Services	157	157	157	157	157	157	157	157	157	354	157	157
Data & security	21	21	21	21	21	21	21	21	21	21	21	21
General conditions, fee and insurance	49	57	20	79	51	38	44	75	38	107	40	42
Sub-total construction	**481**	**557**	**200**	**770**	**502**	**375**	**431**	**729**	**371**	**1,045**	**394**	**410**
Loose furniture	44	44	44	44	44	44	44	44	44	44	44	44
Audio-visual	20	20	20	20	20	20	20	20	20	20	20	20
Professional fees	31	31	31	31	31	31	31	31	31	31	31	31
Sub-total client direct	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**
Total	**576**	**651**	**294**	**865**	**597**	**469**	**526**	**824**	**466**	**1,140**	**489**	**505**

Spotlight location data: Singapore US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	7.55	-
Walls and doors	3.84	1.20	-	78.02	39.65	14.07	22.41	13.98	13.54	15.54	0.38	-
Wall finishes	0.38	0.55	-	15.05	8.07	1.74	0.43	1.87	4.97	7.70	0.21	2.07
Floor finishes	13.22	13.47	-	16.96	15.33	15.48	16.50	16.70	15.35	20.06	15.08	16.94
Ceiling finishes	5.06	5.06	-	8.46	3.67	8.22	8.22	5.06	8.22	5.06	8.72	8.22
Fittings, furnishings and equipment	9.76	38.31	5.40	-	0.44	0.32	0.98	0.86	7.67	10.20	0.19	15.82
Services	75.90	75.90	75.90	75.90	75.90	75.90	75.90	75.90	75.90	127.53	75.90	75.90
IT and AV	15.10	15.10	15.10	15.10	15.10	15.10	15.10	15.10	15.10	15.10	15.10	15.10
Preliminaries, overhead and profit	20.95	25.69	16.11	36.47	27.23	22.31	23.88	22.07	24.10	34.98	20.93	22.89
Sub-total construction	**144.21**	**175.27**	**112.50**	**245.96**	**185.38**	**153.15**	**163.43**	**151.52**	**164.85**	**236.16**	**144.06**	**156.93**
Loose furniture	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19
Audio-visual	12.37	12.37	12.37	12.37	12.37	12.37	12.37	12.37	12.37	12.37	12.37	12.37
Professional fees	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40
Sub-total client direct	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**	**51.96**
Total	**196.17**	**227.23**	**164.46**	**297.92**	**237.35**	**205.11**	**215.39**	**203.48**	**216.82**	**288.13**	**196.02**	**208.89**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	7.87	-
Walls and doors	5.37	1.67	-	110.92	59.31	24.28	36.34	14.73	16.60	27.21	0.52	-
Wall finishes	6.00	0.91	-	36.22	19.41	4.18	0.72	3.12	11.97	34.15	0.35	3.44
Floor finishes	30.30	30.54	-	20.21	18.49	18.65	16.50	16.70	18.51	33.66	15.08	16.94
Ceiling finishes	8.85	5.06	-	24.15	8.39	18.27	20.30	8.22	19.34	5.06	8.72	8.22
Fittings, furnishings and equipment	13.97	61.15	5.40	6.32	0.44	0.32	2.70	11.18	7.67	10.20	3.26	17.67
Services	88.55	88.55	88.55	88.55	88.55	88.55	88.55	88.55	88.55	166.26	88.55	88.55
IT and AV	23.54	23.54	23.54	23.54	23.54	23.54	23.54	23.54	23.54	23.54	23.54	23.54
Preliminaries, overhead and profit	33.39	40.36	21.57	60.06	41.70	33.63	35.81	31.28	35.31	58.09	27.65	29.75
Sub-total construction	**209.98**	**251.79**	**139.05**	**369.98**	**259.83**	**211.43**	**224.46**	**197.32**	**221.50**	**358.17**	**175.55**	**188.11**
Loose furniture	24.06	24.06	24.06	24.06	24.06	24.06	24.06	24.06	24.06	24.06	24.06	24.06
Audio-visual	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19	17.19
Professional fees	28.18	28.18	28.18	28.18	28.18	28.18	28.18	28.18	28.18	28.18	28.18	28.18
Sub-total client direct	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**	**69.43**
Total	**279.41**	**321.22**	**208.49**	**439.41**	**329.27**	**280.86**	**293.89**	**266.76**	**290.93**	**427.60**	**244.98**	**257.55**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	8.35	-
Walls and doors	6.83	2.13	-	128.68	69.03	28.25	41.98	15.96	19.25	16.07	0.66	-
Wall finishes	15.36	23.71	-	49.62	26.60	5.73	9.96	2.34	18.14	44.37	2.03	2.58
Floor finishes	33.05	37.50	-	24.77	22.92	23.07	19.66	22.52	22.94	49.02	18.44	19.71
Ceiling finishes	28.46	12.65	-	35.81	15.54	34.79	34.79	28.46	34.79	5.06	18.17	13.28
Fittings, furnishings and equipment	21.76	74.26	5.40	8.43	0.52	0.37	3.45	41.74	7.72	11.65	5.98	19.61
Services	113.85	113.85	113.85	113.85	113.85	113.85	113.85	113.85	113.85	191.56	113.85	113.85
IT and AV	27.66	27.66	27.66	27.66	27.66	27.66	27.66	27.66	27.66	27.66	27.66	27.66
Preliminaries, overhead and profit	51.31	61.16	29.29	82.52	57.72	48.40	52.27	52.53	50.73	72.96	39.90	40.25
Sub-total construction	**298.28**	**352.92**	**176.20**	**471.34**	**333.85**	**282.13**	**303.62**	**305.06**	**295.08**	**418.34**	**235.04**	**236.95**
Loose furniture	27.50	27.50	27.50	27.50	27.50	27.50	27.50	27.50	27.50	27.50	27.50	27.50
Audio-visual	20.62	20.62	20.62	20.62	20.62	20.62	20.62	20.62	20.62	20.62	20.62	20.62
Professional fees	36.50	36.50	36.50	36.50	36.50	36.50	36.50	36.50	36.50	36.50	36.50	36.50
Sub-total client direct	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**	**84.63**
Total	**382.90**	**437.55**	**260.83**	**555.96**	**418.47**	**366.76**	**388.24**	**389.69**	**379.71**	**502.97**	**319.66**	**321.58**

Spotlight location data: Bangalore US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	1.50	-
Walls and doors	2.03	0.63	-	31.52	16.79	5.34	7.15	2.32	6.14	2.47	0.20	-
Wall finishes	0.17	0.24	-	5.62	3.01	0.65	0.19	0.82	1.86	2.49	0.09	0.91
Floor finishes	6.14	6.17	-	8.40	8.00	8.02	8.16	8.19	8.01	3.40	8.33	8.31
Ceiling finishes	1.52	1.52	-	3.10	1.34	3.01	3.01	1.52	3.01	1.52	3.19	3.01
Fittings, furnishings and equipment	1.32	9.11	0.35	-	0.03	0.02	0.08	0.07	0.50	1.32	0.01	7.53
Services	14.25	14.25	14.25	14.25	14.25	14.25	14.25	14.25	14.25	39.46	14.25	14.25
IT and AV	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.75
Preliminaries, overhead and profit	5.11	6.35	3.05	12.23	8.53	6.23	6.52	5.44	6.69	9.90	5.52	6.74
Sub-total construction	**33.28**	**41.02**	**20.40**	**77.87**	**54.72**	**40.28**	**42.12**	**35.36**	**43.20**	**63.30**	**35.84**	**43.50**
Loose furniture	5.88	5.88	5.88	5.88	5.88	5.88	5.88	5.88	5.88	5.88	5.88	5.88
Audio-visual	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74	1.74
Professional fees	2.55	2.55	2.55	2.55	2.55	2.55	2.55	2.55	2.55	2.55	2.55	2.55
Sub-total client direct	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**	**10.17**
Total	**43.45**	**51.19**	**30.57**	**88.03**	**64.89**	**50.44**	**52.28**	**45.52**	**53.37**	**73.47**	**46.01**	**53.67**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	1.56	-
Walls and doors	3.14	0.98	-	49.94	27.05	10.61	15.16	2.32	6.74	3.30	0.30	-
Wall finishes	7.47	0.24	-	45.81	24.56	5.29	0.19	0.82	15.14	6.66	0.09	0.91
Floor finishes	6.54	6.58	-	9.18	8.76	8.78	8.16	8.19	8.76	2.95	8.33	8.45
Ceiling finishes	1.06	1.52	-	14.63	4.91	10.63	11.66	3.01	11.37	1.52	3.19	3.01
Fittings, furnishings and equipment	1.52	18.24	0.49	3.72	0.03	0.02	1.09	3.77	0.70	2.63	0.32	14.75
Services	25.56	25.56	25.56	25.56	25.56	25.56	25.56	25.56	25.56	57.37	25.56	25.56
IT and AV	4.92	4.92	4.92	4.92	4.92	4.92	4.92	4.92	4.92	4.92	4.92	4.92
Preliminaries, overhead and profit	8.62	10.03	5.15	27.26	16.82	11.43	11.59	8.32	12.75	13.86	7.55	9.95
Sub-total construction	**58.84**	**68.06**	**36.12**	**181.01**	**112.61**	**77.25**	**78.33**	**56.91**	**85.95**	**93.20**	**51.83**	**67.55**
Loose furniture	13.20	13.20	13.20	13.20	13.20	13.20	13.20	13.20	13.20	13.20	13.20	13.20
Audio-visual	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65	2.65
Professional fees	3.09	3.09	3.09	3.09	3.09	3.09	3.09	3.09	3.09	3.09	3.09	3.09
Sub-total client direct	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**	**18.94**
Total	**77.78**	**86.99**	**55.06**	**199.95**	**131.54**	**96.18**	**97.26**	**75.85**	**104.88**	**112.14**	**70.77**	**86.49**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	1.65	-
Walls and doors	3.48	1.09	-	56.19	31.39	13.41	18.68	2.39	7.19	7.86	0.34	-
Wall finishes	2.71	4.18	-	52.39	28.09	6.05	9.75	0.96	20.04	9.88	0.16	1.06
Floor finishes	11.76	11.48	-	13.22	12.68	12.70	8.94	11.31	12.68	3.42	9.15	9.21
Ceiling finishes	14.49	0.61	-	22.68	9.84	22.03	22.03	14.49	22.03	1.52	13.79	12.11
Fittings, furnishings and equipment	2.75	27.77	0.49	6.97	0.03	0.02	1.98	10.21	0.70	4.95	0.81	23.20
Services	33.91	33.91	33.91	33.91	33.91	33.91	33.91	33.91	33.91	98.09	33.91	33.91
IT and AV	7.20	7.20	7.20	7.20	7.20	7.20	7.20	7.20	7.20	7.20	7.20	7.20
Preliminaries, overhead and profit	12.67	14.41	6.60	33.02	20.87	16.00	17.25	13.40	17.48	22.58	11.04	14.49
Sub-total construction	**88.98**	**100.65**	**48.21**	**225.58**	**144.01**	**111.33**	**119.75**	**93.89**	**121.24**	**155.51**	**78.05**	**101.18**
Loose furniture	27.36	27.36	27.36	27.36	27.36	27.36	27.36	27.36	27.36	27.36	27.36	27.36
Audio-visual	4.81	4.81	4.81	4.81	4.81	4.81	4.81	4.81	4.81	4.81	4.81	4.81
Professional fees	3.75	3.75	3.75	3.75	3.75	3.75	3.75	3.75	3.75	3.75	3.75	3.75
Sub-total client direct	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**	**35.92**
Total	**124.90**	**136.57**	**84.13**	**261.50**	**179.93**	**147.25**	**155.67**	**129.81**	**157.16**	**191.43**	**113.97**	**137.10**

Spotlight location data: Dubai and Abi Dhabi US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	15.54	-
Walls and doors	1.57	0.49	-	69.74	36.63	16.51	26.46	7.75	7.73	32.53	0.16	-
Wall finishes	0.41	0.59	-	24.66	13.22	2.85	0.47	2.00	8.15	15.30	0.23	2.21
Floor finishes	12.51	12.64	-	12.93	11.93	12.01	12.57	12.68	11.94	10.93	12.00	13.18
Ceiling finishes	2.67	2.67	-	10.76	4.67	10.45	10.45	2.67	10.45	2.67	11.09	10.45
Fittings, furnishings and equipment	5.11	16.51	0.53	-	0.22	0.15	0.48	0.42	0.86	16.88	0.05	15.90
Services	34.84	34.84	34.84	34.84	34.84	34.84	34.84	34.84	34.84	110.72	34.84	34.84
IT and AV	25.73	25.73	25.73	25.73	25.73	25.73	25.73	25.73	25.73	25.73	25.73	25.73
Preliminaries, overhead and profit	17.67	20.01	12.89	38.75	27.44	22.01	23.87	18.39	21.38	46.70	21.37	21.96
Sub-total construction	**100.52**	**113.49**	**73.99**	**217.41**	**154.67**	**124.57**	**134.86**	**104.49**	**121.08**	**261.48**	**121.01**	**124.27**
Loose furniture	25.08	25.08	25.08	25.08	25.08	25.08	25.08	25.08	25.08	25.08	25.08	25.08
Audio-visual	6.27	6.27	6.27	6.27	6.27	6.27	6.27	6.27	6.27	6.27	6.27	6.27
Professional fees	15.31	15.31	15.31	15.31	15.31	15.31	15.31	15.31	15.31	15.31	15.31	15.31
Sub-total client direct	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**	**46.67**
Total	**147.19**	**160.16**	**120.66**	**264.08**	**201.34**	**171.23**	**181.53**	**151.16**	**167.75**	**308.15**	**167.68**	**170.94**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	16.11	-
Walls and doors	1.81	0.57	-	94.64	48.44	21.06	35.00	11.32	9.01	26.62	0.18	-
Wall finishes	4.75	0.66	-	28.72	15.40	3.32	0.52	2.25	9.49	28.66	0.25	2.48
Floor finishes	21.73	21.85	-	22.48	21.25	21.33	16.15	16.25	21.26	14.46	15.89	16.83
Ceiling finishes	4.85	2.85	-	46.17	15.26	33.00	38.35	11.40	35.45	2.85	12.10	11.40
Fittings, furnishings and equipment	16.55	30.65	1.08	60.81	1.18	0.84	19.18	15.46	2.22	22.44	2.81	23.95
Services	38.77	38.77	38.77	38.77	38.77	38.77	38.77	38.77	38.77	150.38	38.77	38.77
IT and AV	32.33	32.33	32.33	32.33	32.33	32.33	32.33	32.33	32.33	32.33	32.33	32.33
Preliminaries, overhead and profit	28.96	30.68	16.80	79.73	41.91	36.42	43.83	30.70	35.89	68.19	28.37	30.20
Sub-total construction	**149.74**	**158.34**	**88.97**	**403.63**	**214.53**	**187.07**	**224.12**	**158.47**	**184.42**	**345.93**	**146.80**	**155.96**
Loose furniture	37.63	37.63	37.63	37.63	37.63	37.63	37.63	37.63	37.63	37.63	37.63	37.63
Audio-visual	21.08	21.08	21.08	21.08	21.08	21.08	21.08	21.08	21.08	21.08	21.08	21.08
Professional fees	19.17	19.17	19.17	19.17	19.17	19.17	19.17	19.17	19.17	19.17	19.17	19.17
Sub-total client direct	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**	**77.88**
Total	**227.62**	**236.22**	**166.85**	**481.51**	**292.41**	**264.95**	**302.00**	**236.35**	**262.30**	**423.81**	**224.68**	**233.84**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	16.65	-
Walls and doors	2.42	0.75	-	123.34	62.58	27.02	45.56	15.34	11.57	16.05	0.24	-
Wall finishes	28.33	43.72	-	42.02	22.52	4.86	8.49	2.40	15.29	46.26	1.87	2.64
Floor finishes	68.05	77.85	-	45.67	43.55	43.66	26.47	37.36	43.57	23.88	26.36	26.64
Ceiling finishes	44.79	7.84	-	66.86	29.02	64.95	64.95	44.79	64.95	2.91	17.13	7.39
Fittings, furnishings and equipment	13.29	35.31	1.17	69.06	1.15	0.83	21.38	96.30	2.33	25.60	7.77	25.68
Services	42.55	42.55	42.55	42.55	42.55	42.55	42.55	42.55	42.55	193.53	42.55	42.55
IT and AV	38.80	38.80	38.80	38.80	38.80	38.80	38.80	38.80	38.80	38.80	38.80	38.80
Preliminaries, overhead and profit	64.62	67.02	21.02	117.84	65.16	60.26	67.41	75.63	59.25	95.09	40.30	38.15
Sub-total construction	**302.86**	**313.84**	**103.54**	**546.12**	**305.34**	**282.93**	**315.61**	**353.16**	**278.31**	**442.12**	**191.67**	**181.86**
Loose furniture	45.15	45.15	45.15	45.15	45.15	45.15	45.15	45.15	45.15	45.15	45.15	45.15
Audio-visual	28.52	28.52	28.52	28.52	28.52	28.52	28.52	28.52	28.52	28.52	28.52	28.52
Professional fees	25.59	25.59	25.59	25.59	25.59	25.59	25.59	25.59	25.59	25.59	25.59	25.59
Sub-total client direct	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**	**99.26**
Total	**402.12**	**413.10**	**202.80**	**645.39**	**404.60**	**382.19**	**414.87**	**452.42**	**377.57**	**541.38**	**290.94**	**281.12**

Spotlight location data: Dublin US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	10.69	-
Walls and doors	4.11	1.28	-	106.86	63.00	32.21	44.54	7.94	12.17	50.03	0.40	-
Wall finishes	0.64	0.92	-	50.76	27.21	5.87	0.73	3.12	16.77	12.47	0.35	3.45
Floor finishes	16.14	16.36	-	16.50	14.96	15.11	16.05	16.23	14.99	28.22	14.79	17.63
Ceiling finishes	9.56	9.56	-	19.58	8.50	19.02	19.02	9.56	19.02	9.56	20.18	19.02
Fittings, furnishings and equipment	34.44	29.50	3.42	-	0.70	0.51	1.55	1.37	5.13	9.60	0.19	24.11
Services	36.58	36.58	36.58	36.58	36.58	36.58	36.58	36.58	36.58	166.04	36.58	36.58
IT and AV	15.61	15.61	15.61	15.61	15.61	15.61	15.61	15.61	15.61	15.61	15.61	15.61
Preliminaries, overhead and profit	17.32	16.19	7.79	37.28	24.99	18.53	19.95	13.18	17.81	44.35	14.48	17.21
Sub-total construction	**134.40**	**126.00**	**63.40**	**283.17**	**191.55**	**143.42**	**154.04**	**103.60**	**138.09**	**335.88**	**113.28**	**133.61**
Loose furniture	19.51	19.51	19.51	19.51	19.51	19.51	19.51	19.51	19.51	19.51	19.51	19.51
Audio-visual	14.63	14.63	14.63	14.63	14.63	14.63	14.63	14.63	14.63	14.63	14.63	14.63
Professional fees	13.04	13.04	13.04	13.04	13.04	13.04	13.04	13.04	13.04	13.04	13.04	13.04
Sub-total client direct	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**	**47.18**
Total	**181.58**	**173.18**	**110.58**	**330.35**	**238.72**	**190.60**	**201.22**	**150.78**	**185.27**	**383.06**	**160.46**	**180.79**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	11.14	-
Walls and doors	4.58	1.43	-	133.42	78.96	41.29	57.40	8.27	13.37	70.07	0.45	-
Wall finishes	12.43	0.85	-	75.90	40.69	8.77	0.67	2.88	25.08	40.00	0.33	3.19
Floor finishes	28.33	28.56	-	17.80	16.23	16.38	15.56	15.74	16.26	31.35	14.27	17.02
Ceiling finishes	10.63	9.56	-	14.01	5.62	12.46	16.63	17.07	12.70	9.56	18.11	17.07
Fittings, furnishings and equipment	52.98	48.48	3.42	47.15	0.70	0.51	14.41	37.85	5.13	17.03	4.52	39.91
Services	73.16	73.16	73.16	73.16	73.16	73.16	73.16	73.16	73.16	219.92	73.16	73.16
IT and AV	18.53	18.53	18.53	18.53	18.53	18.53	18.53	18.53	18.53	18.53	18.53	18.53
Preliminaries, overhead and profit	29.82	26.70	13.46	57.61	34.97	25.24	29.15	25.61	24.17	61.72	20.49	24.89
Sub-total construction	**230.47**	**207.27**	**108.57**	**437.58**	**268.87**	**196.34**	**225.52**	**199.12**	**188.41**	**468.19**	**161.01**	**193.78**
Loose furniture	33.17	33.17	33.17	33.17	33.17	33.17	33.17	33.17	33.17	33.17	33.17	33.17
Audio-visual	19.02	19.02	19.02	19.02	19.02	19.02	19.02	19.02	19.02	19.02	19.02	19.02
Professional fees	18.84	18.84	18.84	18.84	18.84	18.84	18.84	18.84	18.84	18.84	18.84	18.84
Sub-total client direct	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**	**71.03**
Total	**301.50**	**278.30**	**179.60**	**508.61**	**339.90**	**267.37**	**296.55**	**270.15**	**259.44**	**539.22**	**232.04**	**264.81**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	11.82	-
Walls and doors	6.09	1.90	-	150.39	88.37	45.28	63.04	9.30	15.76	72.29	0.59	-
Wall finishes	12.34	19.04	-	137.43	73.68	15.88	27.35	3.61	50.51	72.01	5.03	3.98
Floor finishes	25.87	30.02	-	18.00	16.43	16.57	17.03	17.50	16.45	31.35	15.82	18.86
Ceiling finishes	19.02	16.58	-	69.29	30.07	67.31	67.31	19.02	67.31	9.36	27.05	26.44
Fittings, furnishings and equipment	76.66	66.21	3.42	66.01	0.70	0.51	19.55	300.10	5.13	22.98	20.37	55.22
Services	73.16	73.16	73.16	73.16	73.16	73.16	73.16	73.16	73.16	230.78	73.16	73.16
IT and AV	24.19	24.19	24.19	24.19	24.19	24.19	24.19	24.19	24.19	24.19	24.19	24.19
Preliminaries, overhead and profit	35.43	34.46	14.26	82.10	46.16	36.29	43.84	67.91	37.78	70.40	26.23	29.93
Sub-total construction	**272.77**	**265.57**	**115.03**	**620.57**	**352.76**	**279.19**	**335.48**	**514.79**	**290.29**	**533.36**	**204.26**	**231.78**
Loose furniture	38.82	38.82	38.82	38.82	38.82	38.82	38.82	38.82	38.82	38.82	38.82	38.82
Audio-visual	19.31	19.31	19.31	19.31	19.31	19.31	19.31	19.31	19.31	19.31	19.31	19.31
Professional fees	20.28	20.28	20.28	20.28	20.28	20.28	20.28	20.28	20.28	20.28	20.28	20.28
Sub-total client direct	**`78.42**	**78.42**	**78.42**	**78.42**	**78.42**	**78.42**	**78.42**	**78.42**	**78.42**	**78.42**	**78.42**	**78.42**
Total	**351.18**	**343.99**	**193.45**	**698.99**	**431.18**	**357.61**	**413.90**	**593.21**	**368.71**	**611.78**	**282.67**	**310.19**

Spotlight location data: Hong Kong US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	15.17	-
Walls and doors	3.82	1.19	-	105.27	63.52	34.39	47.24	5.29	9.27	20.27	0.37	-
Wall finishes	1.46	2.09	-	45.63	24.46	5.27	1.65	7.12	15.08	11.20	0.81	7.87
Floor finishes	25.95	26.16	-	21.53	19.91	20.05	20.94	21.11	19.93	16.11	20.09	22.83
Ceiling finishes	4.61	4.61	-	11.90	5.16	11.56	11.56	4.61	11.56	4.61	12.26	11.56
Fittings, furnishings and equipment	10.13	28.27	1.98	-	0.69	0.49	1.52	1.33	3.15	4.23	0.16	25.34
Services	75.56	75.56	75.56	75.56	75.56	75.56	75.56	75.56	75.56	114.31	75.56	75.56
IT and AV	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18
Preliminaries, overhead and profit	20.33	22.95	13.30	42.47	31.18	24.46	26.24	19.29	22.41	28.21	20.79	23.79
Sub-total construction	**151.04**	**170.01**	**100.01**	**311.53**	**229.65**	**180.96**	**193.88**	**143.49**	**166.13**	**208.12**	**154.38**	**176.11**
Loose furniture	26.57	26.57	26.57	26.57	26.57	26.57	26.57	26.57	26.57	26.57	26.57	26.57
Audio-visual	12.08	12.08	12.08	12.08	12.08	12.08	12.08	12.08	12.08	12.08	12.08	12.08
Professional fees	16.75	16.75	16.75	16.75	16.75	16.75	16.75	16.75	16.75	16.75	16.75	16.75
Sub-total client direct	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**	**55.40**
Total	**206.44**	**225.41**	**155.41**	**366.93**	**285.05**	**236.35**	**249.27**	**198.89**	**221.53**	**263.51**	**209.78**	**231.51**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	15.81	-
Walls and doors	4.82	1.50	-	136.73	82.75	45.15	62.00	8.99	13.14	35.45	0.46	-
Wall finishes	12.53	2.25	-	75.28	40.36	8.70	1.78	7.67	24.88	30.50	0.87	8.47
Floor finishes	25.50	25.72	-	26.91	25.13	25.27	20.94	21.11	25.15	19.44	20.09	23.12
Ceiling finishes	14.94	7.67	-	22.62	8.19	17.94	20.29	11.56	18.77	7.67	12.26	11.56
Fittings, furnishings and equipment	10.80	43.06	1.98	19.49	0.69	0.49	6.83	30.38	3.15	4.23	2.85	28.38
Services	78.89	78.89	78.89	78.89	78.89	78.89	78.89	78.89	78.89	123.26	78.89	78.89
IT and AV	12.75	12.75	12.75	12.75	12.75	12.75	12.75	12.75	12.75	12.75	12.75	12.75
Preliminaries, overhead and profit	24.58	26.43	13.92	58.56	38.74	29.21	31.49	26.35	27.21	36.27	21.97	25.04
Sub-total construction	**184.81**	**198.27**	**107.55**	**431.24**	**287.49**	**218.41**	**234.98**	**197.71**	**203.95**	**269.58**	**165.94**	**188.21**
Loose furniture	36.23	36.23	36.23	36.23	36.23	36.23	36.23	36.23	36.23	36.23	36.23	36.23
Audio-visual	18.12	18.12	18.12	18.12	18.12	18.12	18.12	18.12	18.12	18.12	18.12	18.12
Professional fees	23.37	23.37	23.37	23.37	23.37	23.37	23.37	23.37	23.37	23.37	23.37	23.37
Sub-total client direct	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**	**77.72**
Total	**262.53**	**275.99**	**185.26**	**508.95**	**365.21**	**296.12**	**312.70**	**275.42**	**281.67**	**347.30**	**243.66**	**265.93**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	16.76	-
Walls and doors	6.00	1.87	-	205.25	114.73	56.68	84.25	14.09	19.33	26.24	0.58	-
Wall finishes	191.28	295.16	-	108.06	57.93	12.49	20.71	8.21	40.65	38.44	1.86	9.07
Floor finishes	44.97	51.58	-	31.00	29.07	29.21	26.25	28.76	29.09	96.99	25.64	28.81
Ceiling finishes	55.56	22.22	-	47.70	20.70	46.33	46.33	55.56	46.33	13.44	67.31	63.45
Fittings, furnishings and equipment	32.77	80.70	1.98	185.19	0.69	0.49	52.02	240.39	3.15	58.55	16.09	45.55
Services	94.45	94.45	94.45	94.45	94.45	94.45	94.45	94.45	94.45	172.80	94.45	94.45
IT and AV	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36	15.36
Preliminaries, overhead and profit	69.07	88.42	16.50	108.53	51.88	39.41	52.91	71.70	38.35	66.10	36.70	39.68
Sub-total construction	**509.45**	**649.77**	**128.29**	**795.53**	**384.79**	**294.42**	**392.28**	**528.53**	**286.71**	**487.92**	**274.74**	**296.36**
Loose furniture	44.69	44.69	44.69	44.69	44.69	44.69	44.69	44.69	44.69	44.69	44.69	44.69
Audio-visual	22.95	22.95	22.95	22.95	22.95	22.95	22.95	22.95	22.95	22.95	22.95	22.95
Professional fees	35.14	35.14	35.14	35.14	35.14	35.14	35.14	35.14	35.14	35.14	35.14	35.14
Sub-total client direct	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**	**102.77**
Total	**612.22**	**752.54**	**231.06**	**898.31**	**487.57**	**397.20**	**495.05**	**631.30**	**389.49**	**590.70**	**377.52**	**399.14**

Spotlight location data: Johannesburg US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	2.12	-
Walls and doors	5.74	1.79	-	67.46	38.07	13.16	15.68	1.03	12.38	6.02	0.55	-
Wall finishes	0.23	0.33	-	21.82	11.70	2.52	0.26	1.13	7.21	5.15	0.13	1.25
Floor finishes	23.58	23.61	-	25.48	24.61	24.63	24.76	24.78	24.61	4.73	25.95	25.07
Ceiling finishes	2.81	2.81	-	3.94	1.71	3.83	3.83	2.81	3.83	2.81	4.07	3.83
Fittings, furnishings and equipment	1.72	9.17	0.58	-	0.08	0.06	0.18	0.16	0.85	1.32	0.03	15.87
Services	9.71	9.71	9.71	9.71	9.71	9.71	9.71	9.71	9.71	41.19	9.71	9.71
IT and AV	20.41	20.41	20.41	20.41	20.41	20.41	20.41	20.41	20.41	20.41	20.41	20.41
Preliminaries, overhead and profit	10.14	10.76	4.45	24.53	17.30	11.86	11.95	9.43	12.66	13.10	9.93	12.17
Sub-total construction	**74.33**	**78.59**	**35.14**	**173.34**	**123.58**	**86.18**	**86.78**	**69.47**	**91.65**	**94.74**	**72.89**	**88.31**
Loose furniture	5.65	5.65	5.65	5.65	5.65	5.65	5.65	5.65	5.65	5.65	5.65	5.65
Audio-visual	8.94	8.94	8.94	8.94	8.94	8.94	8.94	8.94	8.94	8.94	8.94	8.94
Professional fees	8.34	8.34	8.34	8.34	8.34	8.34	8.34	8.34	8.34	8.34	8.34	8.34
Sub-total client direct	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**	**22.93**
Total	**97.26**	**101.52**	**58.07**	**196.27**	**146.51**	**109.10**	**109.71**	**92.39**	**114.57**	**117.66**	**95.81**	**111.23**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	2.21	-
Walls and doors	9.29	2.89	-	91.11	52.38	19.15	22.59	1.20	16.64	6.53	0.88	-
Wall finishes	5.86	0.52	-	35.67	19.12	4.12	0.41	1.76	11.79	12.13	0.20	1.95
Floor finishes	24.96	24.99	-	26.59	25.68	25.70	24.76	24.78	25.68	5.49	25.95	25.07
Ceiling finishes	4.47	2.81	-	6.47	2.41	5.31	5.98	3.93	5.51	2.81	4.17	3.93
Fittings, furnishings and equipment	2.57	31.09	0.58	6.64	0.10	0.07	2.04	3.53	0.86	2.13	2.38	20.48
Services	10.68	10.68	10.68	10.68	10.68	10.68	10.68	10.68	10.68	55.17	10.68	10.68
IT and AV	22.10	22.10	22.10	22.10	22.10	22.10	22.10	22.10	22.10	22.10	22.10	22.10
Preliminaries, overhead and profit	12.74	15.32	4.82	33.03	21.67	13.97	14.21	10.71	15.01	17.23	10.81	13.47
Sub-total construction	**92.66**	**110.40**	**38.18**	**232.29**	**154.16**	**101.09**	**102.77**	**78.70**	**108.27**	**123.59**	**79.38**	**97.68**
Loose furniture	6.76	6.76	6.76	6.76	6.76	6.76	6.76	6.76	6.76	6.76	6.76	6.76
Audio-visual	10.22	10.22	10.22	10.22	10.22	10.22	10.22	10.22	10.22	10.22	10.22	10.22
Professional fees	9.64	9.64	9.64	9.64	9.64	9.64	9.64	9.64	9.64	9.64	9.64	9.64
Sub-total client direct	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**	**26.62**
Total	**119.28**	**137.02**	**64.80**	**258.91**	**180.77**	**127.71**	**129.39**	**105.32**	**134.89**	**150.21**	**106.00**	**124.30**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	2.34	-
Walls and doors	10.49	3.27	-	101.09	58.16	21.58	25.71	1.64	18.31	21.51	0.99	-
Wall finishes	7.76	11.97	-	60.53	32.45	6.99	11.74	2.46	22.61	25.02	1.41	2.71
Floor finishes	34.10	35.41	-	32.09	30.96	30.99	29.11	30.39	30.96	6.56	30.42	29.18
Ceiling finishes	11.19	6.13	-	9.73	4.22	9.45	9.45	11.19	9.45	2.81	9.39	7.87
Fittings, furnishings and equipment	4.58	43.15	0.58	7.66	0.11	0.08	2.32	40.28	0.86	2.92	5.56	23.24
Services	20.69	20.69	20.69	20.69	20.69	20.69	20.69	20.69	20.69	79.43	20.69	20.69
IT and AV	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53
Preliminaries, overhead and profit	18.22	23.63	6.74	42.53	28.05	18.39	19.96	21.26	20.62	26.63	15.16	17.35
Sub-total construction	**131.55**	**168.78**	**52.54**	**298.87**	**199.16**	**132.70**	**143.51**	**152.42**	**148.03**	**189.41**	**110.49**	**125.56**
Loose furniture	9.20	9.20	9.20	9.20	9.20	9.20	9.20	9.20	9.20	9.20	9.20	9.20
Audio-visual	23.83	23.83	23.83	23.83	23.83	23.83	23.83	23.83	23.83	23.83	23.83	23.83
Professional fees	13.40	13.40	13.40	13.40	13.40	13.40	13.40	13.40	13.40	13.40	13.40	13.40
Sub-total client direct	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**	**46.43**
Total	**177.99**	**215.21**	**98.97**	**345.30**	**245.60**	**179.13**	**189.94**	**198.86**	**194.47**	**235.84**	**156.92**	**171.99**

Spotlight location data: Munich US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	8.55	-
Walls and doors	1.84	0.57	-	82.83	43.26	19.53	31.61	5.85	5.30	32.36	0.18	-
Wall finishes	0.35	0.49	-	37.78	20.26	4.37	0.39	1.68	12.49	6.80	0.19	1.86
Floor finishes	15.78	15.94	-	21.19	19.84	19.94	20.60	20.73	19.86	21.17	20.29	20.59
Ceiling finishes	4.97	4.97	-	12.25	5.32	11.90	11.90	4.97	11.90	4.97	12.63	11.90
Fittings, furnishings and equipment	19.77	40.02	1.57	-	1.19	0.86	2.62	2.31	2.90	43.92	0.25	37.21
Services	71.02	71.02	71.02	71.02	71.02	71.02	71.02	71.02	71.02	256.17	71.02	71.02
IT and AV	40.58	40.58	40.58	40.58	40.58	40.58	40.58	40.58	40.58	40.58	40.58	40.58
Preliminaries, overhead and profit	27.32	30.79	19.91	47.36	35.81	29.82	31.71	26.03	29.07	72.62	27.20	32.51
Sub-total construction	**181.63**	**204.40**	**133.08**	**313.01**	**237.27**	**198.01**	**210.44**	**173.17**	**193.12**	**478.60**	**180.88**	**215.67**
Loose furniture	15.71	15.71	15.71	15.71	15.71	15.71	15.71	15.71	15.71	15.71	15.71	15.71
Audio-visual	3.51	3.51	3.51	3.51	3.51	3.51	3.51	3.51	3.51	3.51	3.51	3.51
Professional fees	33.22	33.22	33.22	33.22	33.22	33.22	33.22	33.22	33.22	33.22	33.22	33.22
Sub-total client direct	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**	**52.43**
Total	**234.06**	**256.83**	**185.51**	**365.44**	**289.70**	**250.44**	**262.87**	**225.60**	**245.55**	**531.03**	**233.31**	**268.10**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	8.91	-
Walls and doors	2.15	0.67	-	94.92	49.67	21.64	34.54	6.27	7.21	34.88	0.21	-
Wall finishes	8.44	0.49	-	51.57	27.65	5.96	0.39	1.68	17.04	23.88	0.19	1.86
Floor finishes	23.52	23.70	-	23.36	21.88	21.99	20.76	20.90	21.90	24.62	20.30	20.78
Ceiling finishes	5.51	5.46	-	19.36	6.89	15.04	19.41	13.07	15.82	5.46	13.87	13.07
Fittings, furnishings and equipment	19.74	48.46	1.68	89.42	0.07	0.05	24.54	28.00	2.35	43.29	3.29	37.67
Services	89.65	89.65	89.65	89.65	89.65	89.65	89.65	89.65	89.65	271.95	89.65	89.65
IT and AV	43.60	43.60	43.60	43.60	43.60	43.60	43.60	43.60	43.60	43.60	43.60	43.60
Preliminaries, overhead and profit	34.14	37.64	23.76	73.61	42.57	35.10	41.39	36.04	35.04	80.06	31.88	36.67
Sub-total construction	**226.76**	**249.67**	**158.69**	**485.50**	**281.97**	**233.03**	**274.29**	**239.21**	**232.61**	**527.75**	**211.90**	**243.29**
Loose furniture	17.41	17.41	17.41	17.41	17.41	17.41	17.41	17.41	17.41	17.41	17.41	17.41
Audio-visual	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90
Professional fees	39.48	39.48	39.48	39.48	39.48	39.48	39.48	39.48	39.48	39.48	39.48	39.48
Sub-total client direct	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**	**60.79**
Total	**287.55**	**310.46**	**219.48**	**546.29**	**342.76**	**293.82**	**335.08**	**300.00**	**293.40**	**588.54**	**272.69**	**304.08**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	9.45	-
Walls and doors	4.33	1.35	-	112.87	59.04	24.67	38.88	9.36	9.99	37.54	0.42	-
Wall finishes	11.45	17.67	-	68.58	36.76	7.92	13.69	1.80	25.16	46.74	2.61	1.99
Floor finishes	28.87	31.08	-	25.92	24.28	24.40	22.67	24.34	24.30	29.42	22.14	22.74
Ceiling finishes	54.43	6.15	-	27.82	12.07	27.02	27.02	54.43	27.02	6.00	29.93	19.72
Fittings, furnishings and equipment	24.65	52.73	1.81	95.76	0.07	0.05	26.27	135.72	2.53	46.36	9.81	40.39
Services	119.89	119.89	119.89	119.89	119.89	119.89	119.89	119.89	119.89	305.06	119.89	119.89
IT and AV	47.80	47.80	47.80	47.80	47.80	47.80	47.80	47.80	47.80	47.80	47.80	47.80
Preliminaries, overhead and profit	51.75	49.10	29.81	89.05	53.28	44.61	52.62	70.10	45.50	92.70	42.86	44.75
Sub-total construction	**343.16**	**325.76**	**199.31**	**587.68**	**353.19**	**296.36**	**348.83**	**463.44**	**302.18**	**611.62**	**284.90**	**297.28**
Loose furniture	19.12	19.12	19.12	19.12	19.12	19.12	19.12	19.12	19.12	19.12	19.12	19.12
Audio-visual	4.88	4.88	4.88	4.88	4.88	4.88	4.88	4.88	4.88	4.88	4.88	4.88
Professional fees	51.66	51.66	51.66	51.66	51.66	51.66	51.66	51.66	51.66	51.66	51.66	51.66
Sub-total client direct	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**	**75.66**
Total	**418.82**	**401.41**	**274.96**	**663.34**	**428.84**	**372.02**	**424.49**	**539.10**	**377.84**	**687.27**	**360.56**	**372.94**

Spotlight location data: Paris US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	7.80	-
Walls and doors	4.11	1.28	-	115.57	64.02	31.79	48.05	8.26	6.57	25.07	0.40	-
Wall finishes	0.99	1.41	-	40.06	21.48	4.63	1.12	4.81	13.24	12.16	0.54	5.31
Floor finishes	16.25	16.49	-	17.68	16.08	16.23	17.20	17.39	16.10	13.03	15.93	18.42
Ceiling finishes	8.97	8.97	-	13.86	6.01	13.46	13.46	8.97	13.46	8.97	14.28	13.46
Fittings, furnishings and equipment	14.87	23.00	1.48	-	0.40	0.29	0.89	0.78	2.28	32.21	0.10	21.41
Services	69.86	69.86	69.86	69.86	69.86	69.86	69.86	69.86	69.86	186.93	69.86	69.86
IT and AV	16.58	16.58	16.58	16.58	16.58	16.58	16.58	16.58	16.58	16.58	16.58	16.58
Preliminaries, overhead and profit	22.64	23.71	14.77	48.20	33.94	26.46	29.04	21.74	23.80	52.04	21.54	25.05
Sub-total construction	**154.27**	**161.31**	**102.69**	**321.81**	**228.37**	**179.29**	**196.20**	**148.39**	**161.90**	**346.99**	**147.04**	**170.10**
Loose furniture	20.49	20.49	20.49	20.49	20.49	20.49	20.49	20.49	20.49	20.49	20.49	20.49
Audio-visual	7.33	7.33	7.33	7.33	7.33	7.33	7.33	7.33	7.33	7.33	7.33	7.33
Professional fees	16.14	16.14	16.14	16.14	16.14	16.14	16.14	16.14	16.14	16.14	16.14	16.14
Sub-total client direct	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**	**43.95**
Total	**198.22**	**205.26**	**146.64**	**365.76**	**272.33**	**223.24**	**240.15**	**192.35**	**205.85**	**390.95**	**190.99**	**214.05**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	8.13	-
Walls and doors	5.50	1.71	-	169.92	89.86	41.97	67.17	5.89	7.83	32.97	0.52	-
Wall finishes	9.31	1.55	-	56.02	30.03	6.47	1.23	5.29	18.51	33.45	0.60	5.84
Floor finishes	24.93	25.17	-	21.60	19.89	20.03	19.55	19.73	19.91	24.70	18.42	20.58
Ceiling finishes	4.58	9.17	-	20.69	7.74	17.02	20.17	14.63	17.65	9.17	15.52	14.63
Fittings, furnishings and equipment	21.74	35.76	1.85	32.52	0.50	0.36	9.98	20.88	2.85	44.90	3.95	28.89
Services	83.83	83.83	83.83	83.83	83.83	83.83	83.83	83.83	83.83	232.21	83.83	83.83
IT and AV	22.24	22.24	22.24	22.24	22.24	22.24	22.24	22.24	22.24	22.24	22.24	22.24
Preliminaries, overhead and profit	29.76	31.07	18.20	72.00	44.51	33.32	39.12	29.82	29.88	70.71	26.35	30.45
Sub-total construction	**201.89**	**210.50**	**126.11**	**478.82**	**298.59**	**225.24**	**263.28**	**202.31**	**202.70**	**470.34**	**179.57**	**206.47**
Loose furniture	29.26	29.26	29.26	29.26	29.26	29.26	29.26	29.26	29.26	29.26	29.26	29.26
Audio-visual	8.78	8.78	8.78	8.78	8.78	8.78	8.78	8.78	8.78	8.78	8.78	8.78
Professional fees	20.39	20.39	20.39	20.39	20.39	20.39	20.39	20.39	20.39	20.39	20.39	20.39
Sub-total client direct	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**	**58.43**
Total	**260.33**	**268.93**	**184.55**	**537.25**	**357.02**	**283.68**	**321.72**	**260.74**	**261.14**	**528.78**	**238.00**	**264.90**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	8.63	-
Walls and doors	6.84	2.13	-	235.92	126.57	58.22	90.40	6.94	14.30	36.76	0.65	-
Wall finishes	14.81	22.85	-	118.81	63.69	13.73	23.54	6.25	43.79	63.11	4.08	6.90
Floor finishes	38.35	44.29	-	26.44	24.45	24.62	29.62	27.49	24.48	38.60	28.81	29.95
Ceiling finishes	34.14	-	-	65.27	28.33	63.41	63.41	34.14	63.41	9.95	33.28	29.46
Fittings, furnishings and equipment	31.85	46.84	2.22	40.65	0.80	0.58	12.86	137.74	3.55	55.12	11.38	40.17
Services	97.35	97.35	97.35	97.35	97.35	97.35	97.35	97.35	97.35	272.08	97.35	97.35
IT and AV	26.24	26.24	26.24	26.24	26.24	26.24	26.24	26.24	26.24	26.24	26.24	26.24
Preliminaries, overhead and profit	43.54	41.76	21.26	108.54	64.75	49.76	60.43	59.12	47.77	88.95	36.49	40.03
Sub-total construction	**293.13**	**281.47**	**147.07**	**719.22**	**432.19**	**333.91**	**403.85**	**395.27**	**320.88**	**590.81**	**246.90**	**270.10**
Loose furniture	46.82	46.82	46.82	46.82	46.82	46.82	46.82	46.82	46.82	46.82	46.82	46.82
Audio-visual	10.73	10.73	10.73	10.73	10.73	10.73	10.73	10.73	10.73	10.73	10.73	10.73
Professional fees	28.39	28.39	28.39	28.39	28.39	28.39	28.39	28.39	28.39	28.39	28.39	28.39
Sub-total client direct	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**	**85.95**
Total	**379.08**	**367.42**	**233.02**	**805.17**	**518.14**	**419.86**	**489.80**	**481.22**	**406.83**	**676.76**	**332.85**	**356.05**

Spotlight location data: San Francisco US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	18	-
Millwork	36	16	-	2	1	1	1	13	6	19	0	13
Architectural metal and glass	-	-	4	110	68	42	61	-	5	10	0	-
Ceiling, carpentry, partitions and wall covering	23	18	-	144	73	51	49	19	67	21	43	45
Access floors and finishes	39	39	-	37	36	36	36	36	36	53	38	36
Appliances and toilet accessories	2	10	-	-	1	1	2	2	1	38	0	11
Services	129	129	129	129	129	129	129	129	129	176	129	129
Data & security	9	9	9	9	9	9	9	9	9	9	9	9
General conditions, fee and insurance	24	23	14	45	33	28	30	21	26	34	24	25
Sub-total construction	**261**	**243**	**156**	**476**	**349**	**296**	**316**	**228**	**278**	**360**	**262**	**268**
Loose furniture	19	19	19	19	19	19	19	19	19	19	19	19
Audio-visual	5	5	5	5	5	5	5	5	5	5	5	5
Professional fees	24	24	24	24	24	24	24	24	24	24	24	24
Sub-total client direct	**48**	**48**	**48**	**48**	**48**	**48**	**48**	**48**	**48**	**48**	**48**	**48**
Total	**309**	**291**	**203**	**524**	**397**	**344**	**364**	**276**	**326**	**407**	**310**	**315**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	20	-
Millwork	59	25	-	108	2	1	31	41	7	15	4	13
Architectural metal and glass	-	-	1	168	100	60	88	-	1	16	0	-
Ceiling, carpentry, partitions and wall covering	37	21	-	152	77	40	49	50	62	77	47	50
Access floors and finishes	64	64	-	42	40	40	38	38	40	59	40	39
Appliances and toilet accessories	1	10	-	-	1	0	1	1	0	56	0	11
Services	151	151	151	151	151	151	151	151	151	197	151	151
Data & security	11	11	11	11	11	11	11	11	11	11	11	11
General conditions, fee and insurance	36	32	18	72	43	34	42	33	31	49	31	31
Sub-total construction	**359**	**314**	**181**	**704**	**424**	**339**	**411**	**324**	**304**	**481**	**303**	**305**
Loose furniture	27	27	27	27	27	27	27	27	27	27	27	27
Audio-visual	7	7	7	7	7	7	7	7	7	7	7	7
Professional fees	36	36	36	36	36	36	36	36	36	36	36	36
Sub-total client direct	**70**	**70**	**70**	**70**	**70**	**70**	**70**	**70**	**70**	**70**	**70**	**70**
Total	**429**	**384**	**251**	**773**	**494**	**408**	**481**	**394**	**373**	**551**	**373**	**375**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	21	-
Millwork	86	53	-	140	3	1	39	118	8	50	9	19
Architectural metal and glass	-	-	1	207	113	61	96	-	2	24	0	-
Ceiling, carpentry, partitions and wall covering	138	93	-	239	124	64	72	84	105	116	55	44
Access floors and finishes	95	113	-	49	48	48	47	48	48	73	50	49
Appliances and toilet accessories	5	15	-	-	0	0	1	1	0	82	0	16
Services	178	178	178	178	178	178	178	178	178	258	178	178
Data & security	13	13	13	13	13	13	13	13	13	13	13	13
General conditions, fee and insurance	66	60	24	107	61	47	57	57	45	79	41	40
Sub-total construction	**581**	**526**	**216**	**933**	**541**	**412**	**504**	**499**	**398**	**697**	**368**	**359**
Loose furniture	33	33	33	33	33	33	33	33	33	33	33	33
Audio-visual	8	8	8	8	8	8	8	8	8	8	8	8
Professional fees	54	54	54	54	54	54	54	54	54	54	54	54
Sub-total client direct	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**	**95**
Total	**676**	**621**	**311**	**1,028**	**636**	**507**	**599**	**594**	**493**	**792**	**463**	**454**

Spotlight location data: São Paulo US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	2.97	-
Walls and doors	0.95	0.30	-	41.04	21.78	10.08	16.00	4.51	3.85	8.77	0.09	-
Wall finishes	0.33	0.48	-	9.10	4.88	1.05	0.38	1.62	3.01	4.39	0.18	1.79
Floor finishes	12.82	12.88	-	11.73	11.11	11.15	11.40	11.45	11.11	5.14	11.48	12.29
Ceiling finishes	1.39	1.39	-	5.14	2.23	4.99	4.99	1.39	4.99	1.39	5.30	4.99
Fittings, furnishings and equipment	4.16	5.96	0.23	-	0.07	0.05	0.16	0.14	0.36	7.75	0.02	6.60
Services	45.40	45.40	45.40	45.40	45.40	45.40	45.40	45.40	45.40	72.81	45.40	45.40
IT and AV	12.27	12.27	12.27	12.27	12.27	12.27	12.27	12.27	12.27	12.27	12.27	12.27
Preliminaries, overhead and profit	8.21	8.37	5.87	13.89	10.66	9.13	9.80	8.14	8.65	12.43	8.25	8.93
Sub-total construction	**85.53**	**87.05**	**63.77**	**138.57**	**108.39**	**94.12**	**100.40**	**84.94**	**89.63**	**124.94**	**85.97**	**92.27**
Loose furniture	14.23	14.23	14.23	14.23	14.23	14.23	14.23	14.23	14.23	14.23	14.23	14.23
Audio-visual	13.31	13.31	13.31	13.31	13.31	13.31	13.31	13.31	13.31	13.31	13.31	13.31
Professional fees	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60
Sub-total client direct	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**	**31.15**
Total	**116.68**	**118.19**	**94.92**	**169.72**	**139.54**	**125.27**	**131.55**	**116.08**	**120.78**	**156.08**	**117.11**	**123.42**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	3.09	-
Walls and doors	1.05	0.33	-	72.48	34.95	13.53	24.63	4.08	4.41	14.46	0.10	-
Wall finishes	2.60	0.52	-	15.59	8.36	1.80	0.41	1.78	5.15	16.10	0.20	1.97
Floor finishes	11.41	11.47	-	13.64	12.97	13.00	11.72	11.76	12.97	6.19	11.84	12.90
Ceiling finishes	1.13	1.39	-	14.33	4.80	10.39	12.15	4.25	11.12	1.39	4.51	4.25
Fittings, furnishings and equipment	7.64	13.36	0.23	17.90	0.10	0.07	5.11	17.38	0.38	7.84	1.53	7.82
Services	56.65	56.65	56.65	56.65	56.65	56.65	56.65	56.65	56.65	100.10	56.65	56.65
IT and AV	13.56	13.56	13.56	13.56	13.56	13.56	13.56	13.56	13.56	13.56	13.56	13.56
Preliminaries, overhead and profit	12.63	13.12	9.09	29.14	18.23	14.87	17.16	14.94	14.16	22.47	12.25	13.10
Sub-total construction	**106.67**	**110.40**	**79.52**	**233.29**	**149.61**	**123.88**	**141.40**	**124.42**	**118.39**	**182.11**	**103.74**	**110.25**
Loose furniture	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09	20.09
Audio-visual	14.85	14.85	14.85	14.85	14.85	14.85	14.85	14.85	14.85	14.85	14.85	14.85
Professional fees	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50
Sub-total client direct	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**	**39.44**
Total	**146.12**	**149.84**	**118.97**	**272.73**	**189.05**	**163.32**	**180.84**	**163.86**	**157.84**	**221.55**	**143.18**	**149.69**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	3.28	-
Walls and doors	1.75	0.54	-	94.21	46.46	18.99	33.39	6.97	6.42	9.81	0.17	-
Wall finishes	39.08	60.30	-	22.23	11.91	2.57	4.61	1.78	7.95	25.96	1.31	1.97
Floor finishes	66.87	84.72	-	22.04	20.92	20.99	18.44	20.31	20.93	25.39	18.53	19.59
Ceiling finishes	11.56	0.87	-	22.27	9.66	21.63	21.63	11.56	21.63	1.39	10.26	8.79
Fittings, furnishings and equipment	6.03	14.74	0.23	17.90	0.13	0.09	5.17	41.13	0.39	7.92	2.90	8.26
Services	76.31	76.31	76.31	76.31	76.31	76.31	76.31	76.31	76.31	142.24	76.31	76.31
IT and AV	14.26	14.26	14.26	14.26	14.26	14.26	14.26	14.26	14.26	14.26	14.26	14.26
Preliminaries, overhead and profit	36.99	43.45	14.48	46.59	30.47	26.00	29.42	29.15	24.75	38.99	21.00	21.38
Sub-total construction	**252.84**	**295.20**	**105.27**	**315.80**	**210.14**	**180.85**	**203.22**	**201.46**	**172.65**	**265.97**	**148.02**	**150.56**
Loose furniture	36.83	36.83	36.83	36.83	36.83	36.83	36.83	36.83	36.83	36.83	36.83	36.83
Audio-visual	15.54	15.54	15.54	15.54	15.54	15.54	15.54	15.54	15.54	15.54	15.54	15.54
Professional fees	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11	8.11
Sub-total client direct	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**	**60.47**
Total	**313.31**	**355.67**	**165.74**	**376.27**	**270.61**	**241.32**	**263.70**	**261.93**	**233.12**	**326.44**	**208.49**	**211.04**

Spotlight location data: Seoul US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	5.27	-
Walls and doors	3.56	1.11	-	65.62	37.52	17.37	24.09	3.33	8.10	5.50	0.35	-
Wall finishes	0.67	0.95	-	11.85	6.35	1.37	0.76	3.25	3.92	7.78	0.37	3.59
Floor finishes	9.76	9.84	-	12.42	11.68	11.74	12.08	12.14	11.69	5.72	12.00	12.48
Ceiling finishes	3.96	3.96	-	16.98	7.37	16.49	16.49	3.96	16.49	3.96	17.50	16.49
Fittings, furnishings and equipment	13.14	8.47	0.38	-	0.24	0.18	0.54	0.47	0.67	10.39	0.05	10.37
Services	19.79	19.79	19.79	19.79	19.79	19.79	19.79	19.79	19.79	69.24	19.79	19.79
IT and AV	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43
Preliminaries, overhead and profit	9.81	8.79	5.20	21.18	14.62	12.22	13.24	8.62	11.28	17.56	10.48	11.58
Sub-total construction	**83.10**	**75.34**	**47.79**	**170.26**	**120.01**	**101.58**	**109.41**	**73.99**	**94.36**	**142.57**	**88.23**	**96.72**
Loose furniture	13.19	13.19	13.19	13.19	13.19	13.19	13.19	13.19	13.19	13.19	13.19	13.19
Audio-visual	9.89	9.89	9.89	9.89	9.89	9.89	9.89	9.89	9.89	9.89	9.89	9.89
Professional fees	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18	9.18
Sub-total client direct	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**	**32.27**
Total	**115.37**	**107.60**	**80.06**	**202.53**	**152.28**	**133.84**	**141.67**	**106.25**	**126.63**	**174.84**	**120.50**	**128.99**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	5.50	-
Walls and doors	4.29	1.34	-	92.46	54.84	27.90	38.10	4.97	9.69	8.21	0.42	-
Wall finishes	3.25	1.10	-	19.09	10.23	2.21	0.87	3.74	6.31	13.90	0.42	4.13
Floor finishes	13.39	13.48	-	17.91	16.99	17.05	12.13	12.20	17.00	8.84	12.01	12.66
Ceiling finishes	6.93	3.96	-	16.26	5.71	12.46	19.49	16.49	13.15	3.96	17.50	16.49
Fittings, furnishings and equipment	17.51	25.89	1.00	10.44	0.24	0.18	3.39	22.90	1.52	16.25	3.44	12.21
Services	25.07	25.07	25.07	25.07	25.07	25.07	25.07	25.07	25.07	105.86	25.07	25.07
IT and AV	25.94	25.94	25.94	25.94	25.94	25.94	25.94	25.94	25.94	25.94	25.94	25.94
Preliminaries, overhead and profit	13.42	13.48	6.55	30.60	20.03	15.66	17.86	15.74	13.78	26.84	12.48	13.44
Sub-total construction	**109.81**	**110.26**	**58.56**	**237.77**	**159.06**	**126.45**	**142.84**	**127.05**	**112.46**	**209.81**	**102.77**	**109.94**
Loose furniture	19.79	19.79	19.79	19.79	19.79	19.79	19.79	19.79	19.79	19.79	19.79	19.79
Audio-visual	13.05	13.05	13.05	13.05	13.05	13.05	13.05	13.05	13.05	13.05	13.05	13.05
Professional fees	11.20	11.20	11.20	11.20	11.20	11.20	11.20	11.20	11.20	11.20	11.20	11.20
Sub-total client direct	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**	**44.04**
Total	**153.84**	**154.30**	**102.59**	**281.81**	**203.10**	**170.49**	**186.88**	**171.09**	**156.49**	**253.84**	**146.80**	**153.98**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	5.83	-
Walls and doors	4.83	1.51	-	109.34	65.10	33.59	45.94	5.99	11.33	17.85	0.47	-
Wall finishes	18.36	28.33	-	31.61	16.95	3.65	6.59	3.25	11.27	25.37	1.93	3.59
Floor finishes	29.02	32.70	-	21.24	20.11	20.18	18.34	19.81	20.12	11.33	18.34	18.34
Ceiling finishes	12.60	14.51	-	28.86	12.52	28.03	28.03	12.60	28.03	3.96	22.65	23.09
Fittings, furnishings and equipment	21.07	31.21	1.50	13.19	0.24	0.18	4.14	114.46	2.21	20.02	9.06	15.57
Services	30.34	30.34	30.34	30.34	30.34	30.34	30.34	30.34	30.34	125.84	30.34	30.34
IT and AV	29.54	29.54	29.54	29.54	29.54	29.54	29.54	29.54	29.54	29.54	29.54	29.54
Preliminaries, overhead and profit	21.23	24.81	7.73	40.17	25.88	21.19	23.98	32.47	19.17	35.34	16.82	17.19
Sub-total construction	**166.99**	**192.94**	**69.11**	**304.29**	**200.68**	**166.71**	**186.89**	**248.45**	**152.01**	**269.24**	**134.97**	**137.65**
Loose furniture	32.98	32.98	32.98	32.98	32.98	32.98	32.98	32.98	32.98	32.98	32.98	32.98
Audio-visual	16.31	16.31	16.31	16.31	16.31	16.31	16.31	16.31	16.31	16.31	16.31	16.31
Professional fees	14.82	14.82	14.82	14.82	14.82	14.82	14.82	14.82	14.82	14.82	14.82	14.82
Sub-total client direct	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**	**64.11**
Total	**231.09**	**257.04**	**133.22**	**368.40**	**264.79**	**230.81**	**251.00**	**312.56**	**216.12**	**333.35**	**199.08**	**201.76**

Spotlight location data: Sydney US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	7.18	-
Walls and doors	3.41	1.06	-	90.90	48.52	20.55	31.27	9.00	11.46	16.66	0.35	-
Wall finishes	0.60	0.86	-	52.72	28.26	6.09	0.68	2.93	17.42	13.67	0.33	3.24
Floor finishes	20.86	21.14	-	20.11	18.24	18.42	19.57	19.79	18.27	19.11	18.02	22.21
Ceiling finishes	9.51	9.51	-	15.30	6.64	14.86	14.86	9.51	14.86	9.51	15.77	14.86
Fittings, furnishings and equipment	19.20	31.03	2.03	-	1.08	0.77	2.37	2.09	3.46	12.75	0.23	24.17
Services	71.35	71.35	71.35	71.35	71.35	71.35	71.35	71.35	71.35	229.28	71.35	71.35
IT and AV	7.73	7.73	7.73	7.73	7.73	7.73	7.73	7.73	7.73	7.73	7.73	7.73
Preliminaries, overhead and profit	15.56	16.76	9.38	30.62	21.46	16.42	17.38	14.33	16.99	36.69	14.16	16.87
Sub-total construction	**148.23**	**159.45**	**90.48**	**288.72**	**203.28**	**156.19**	**165.21**	**136.73**	**161.54**	**345.40**	**135.13**	**160.43**
Loose furniture	11.89	11.89	11.89	11.89	11.89	11.89	11.89	11.89	11.89	11.89	11.89	11.89
Audio-visual	5.95	5.95	5.95	5.95	5.95	5.95	5.95	5.95	5.95	5.95	5.95	5.95
Professional fees	16.62	16.62	16.62	16.62	16.62	16.62	16.62	16.62	16.62	16.62	16.62	16.62
Sub-total client direct	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**	**34.46**
Total	**182.69**	**193.90**	**124.94**	**323.18**	**237.73**	**190.65**	**199.67**	**171.19**	**196.00**	**379.86**	**169.59**	**194.89**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	7.49	-
Walls and doors	4.73	1.47	-	125.77	70.24	32.74	47.54	9.00	13.80	16.66	0.47	-
Wall finishes	14.54	1.07	-	88.69	47.54	10.25	0.85	3.66	29.31	37.42	0.41	4.05
Floor finishes	29.18	29.46	-	24.40	22.40	22.58	19.57	19.79	22.43	32.53	18.02	22.21
Ceiling finishes	7.73	9.51	-	35.94	12.71	27.75	31.08	14.86	29.23	9.51	15.77	14.86
Fittings, furnishings and equipment	22.88	44.85	2.03	17.84	1.57	1.13	8.33	12.75	3.77	31.27	8.49	30.07
Services	95.13	95.13	95.13	95.13	95.13	95.13	95.13	95.13	95.13	266.37	95.13	95.13
IT and AV	17.24	17.24	17.24	17.24	17.24	17.24	17.24	17.24	17.24	17.24	17.24	17.24
Preliminaries, overhead and profit	23.81	24.76	13.79	51.57	33.61	25.80	27.48	21.34	26.34	52.35	20.11	22.78
Sub-total construction	**215.25**	**223.50**	**128.19**	**456.57**	**300.46**	**232.62**	**247.23**	**193.78**	**237.25**	**463.36**	**183.14**	**206.35**
Loose furniture	20.81	20.81	20.81	20.81	20.81	20.81	20.81	20.81	20.81	20.81	20.81	20.81
Audio-visual	14.86	14.86	14.86	14.86	14.86	14.86	14.86	14.86	14.86	14.86	14.86	14.86
Professional fees	22.38	22.38	22.38	22.38	22.38	22.38	22.38	22.38	22.38	22.38	22.38	22.38
Sub-total client direct	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**	**58.06**
Total	**273.30**	**281.56**	**186.25**	**514.63**	**358.51**	**290.68**	**305.28**	**251.84**	**295.31**	**521.41**	**241.20**	**264.41**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	7.94	-
Walls and doors	8.02	2.50	-	186.00	112.32	59.45	80.56	10.22	18.79	23.68	0.78	-
Wall finishes	45.13	69.64	-	154.50	82.82	17.85	29.35	4.40	58.42	50.06	1.99	4.85
Floor finishes	80.30	102.00	-	27.46	25.38	25.55	23.73	25.73	25.40	41.92	22.44	26.66
Ceiling finishes	89.19	5.95	-	52.03	22.58	50.54	50.54	89.19	50.54	9.51	44.32	26.76
Fittings, furnishings and equipment	86.91	71.10	2.03	24.77	1.57	1.13	10.22	109.17	3.77	36.93	15.86	48.78
Services	148.65	148.65	148.65	148.65	148.65	148.65	148.65	148.65	148.65	364.60	148.65	148.65
IT and AV	21.40	21.40	21.40	21.40	21.40	21.40	21.40	21.40	21.40	21.40	21.40	21.40
Preliminaries, overhead and profit	65.81	57.64	22.76	84.74	56.73	44.11	49.69	55.89	44.44	75.40	35.54	37.46
Sub-total construction	**545.41**	**478.88**	**194.84**	**699.54**	**471.45**	**368.68**	**414.15**	**464.65**	**371.42**	**623.51**	**298.92**	**314.57**
Loose furniture	26.76	26.76	26.76	26.76	26.76	26.76	26.76	26.76	26.76	26.76	26.76	26.76
Audio-visual	32.70	32.70	32.70	32.70	32.70	32.70	32.70	32.70	32.70	32.70	32.70	32.70
Professional fees	36.84	36.84	36.84	36.84	36.84	36.84	36.84	36.84	36.84	36.84	36.84	36.84
Sub-total client direct	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**	**96.30**
Total	**641.71**	**575.18**	**291.14**	**795.84**	**567.75**	**464.98**	**510.45**	**560.95**	**467.72**	**719.81**	**395.22**	**410.87**

Spotlight location data: Tokyo US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	15.13	-
Walls and doors	4.14	1.29	-	152.39	78.43	33.08	53.97	18.46	17.09	40.19	0.41	-
Wall finishes	1.24	1.77	-	33.19	17.79	3.84	1.40	6.04	10.97	10.99	0.68	6.68
Floor finishes	26.92	27.16	-	25.28	23.44	23.60	24.58	24.77	23.47	18.96	23.73	25.97
Ceiling finishes	9.20	9.20	-	13.89	6.03	13.49	13.49	9.20	13.49	9.20	14.31	13.49
Fittings, furnishings and equipment	10.22	38.07	1.33	-	0.25	0.18	0.56	0.49	1.97	26.86	0.07	16.49
Services	70.51	70.51	70.51	70.51	70.51	70.51	70.51	70.51	70.51	175.58	70.51	70.51
IT and AV	16.56	16.56	16.56	16.56	16.56	16.56	16.56	16.56	16.56	16.56	16.56	16.56
Preliminaries, overhead and profit	31.40	37.58	19.30	72.92	49.21	36.79	41.54	33.13	35.06	69.69	32.02	34.02
Sub-total construction	**170.18**	**202.14**	**107.70**	**384.74**	**262.23**	**198.04**	**222.62**	**179.16**	**189.12**	**368.02**	**173.42**	**183.72**
Loose furniture	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53	24.53
Audio-visual	15.33	15.33	15.33	15.33	15.33	15.33	15.33	15.33	15.33	15.33	15.33	15.33
Professional fees	22.11	22.11	22.11	22.11	22.11	22.11	22.11	22.11	22.11	22.11	22.11	22.11
Sub-total client direct	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**	**61.96**
Total	**232.15**	**264.10**	**169.66**	**446.70**	**324.19**	**260.00**	**284.58**	**241.13**	**251.09**	**429.98**	**235.39**	**245.68**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	15.76	-
Walls and doors	6.21	1.93	-	207.24	108.84	46.83	73.95	21.52	21.80	52.40	0.60	-
Wall finishes	7.24	2.22	-	42.71	22.89	4.93	1.76	7.55	14.11	34.75	0.85	8.35
Floor finishes	34.28	34.52	-	29.70	27.74	27.89	26.42	26.61	27.76	25.36	25.68	27.81
Ceiling finishes	13.80	9.20	-	19.24	7.27	16.01	18.51	13.49	16.56	9.20	14.31	13.49
Fittings, furnishings and equipment	15.63	93.82	1.56	22.48	0.25	0.18	6.69	9.66	2.29	31.14	5.53	21.66
Services	88.91	88.91	88.91	88.91	88.91	88.91	88.91	88.91	88.91	223.34	88.91	88.91
IT and AV	18.29	18.29	18.29	18.29	18.29	18.29	18.29	18.29	18.29	18.29	18.29	18.29
Preliminaries, overhead and profit	42.06	57.55	23.92	100.67	63.62	46.55	54.10	42.47	43.35	92.49	38.60	40.66
Sub-total construction	**226.42**	**306.44**	**132.68**	**529.24**	**337.81**	**249.59**	**288.62**	**228.51**	**233.08**	**486.97**	**208.55**	**219.17**
Loose furniture	27.59	27.59	27.59	27.59	27.59	27.59	27.59	27.59	27.59	27.59	27.59	27.59
Audio-visual	18.19	18.19	18.19	18.19	18.19	18.19	18.19	18.19	18.19	18.19	18.19	18.19
Professional fees	27.73	27.73	27.73	27.73	27.73	27.73	27.73	27.73	27.73	27.73	27.73	27.73
Sub-total client direct	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**	**73.51**
Total	**299.93**	**379.95**	**206.19**	**602.75**	**411.32**	**323.10**	**362.13**	**302.02**	**306.59**	**560.48**	**282.06**	**292.68**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Internal stairs	-	-	-	-	-	-	-	-	-	-	16.72	-
Walls and doors	8.98	2.80	-	326.08	169.14	73.37	118.90	29.22	26.92	74.93	0.87	-
Wall finishes	31.03	47.88	-	61.52	32.98	7.11	13.02	10.58	21.71	63.88	4.27	11.68
Floor finishes	67.33	81.89	-	33.36	31.08	31.26	30.60	31.93	31.10	42.22	29.65	32.06
Ceiling finishes	67.45	18.39	-	25.25	10.96	24.53	24.53	67.45	24.53	9.20	34.56	21.46
Fittings, furnishings and equipment	27.58	113.73	1.79	26.57	0.34	0.25	8.00	146.40	2.67	36.09	14.15	28.18
Services	107.30	107.30	107.30	107.30	107.30	107.30	107.30	107.30	107.30	288.35	107.30	107.30
IT and AV	21.94	21.94	21.94	21.94	21.94	21.94	21.94	21.94	21.94	21.94	21.94	21.94
Preliminaries, overhead and profit	76.68	91.63	28.54	141.57	86.79	60.87	74.92	96.65	53.77	125.88	52.16	50.52
Sub-total construction	**408.29**	**485.56**	**159.57**	**743.60**	**460.52**	**326.62**	**399.20**	**511.46**	**289.94**	**662.49**	**281.62**	**273.14**
Loose furniture	33.72	33.72	33.72	33.72	33.72	33.72	33.72	33.72	33.72	33.72	33.72	33.72
Audio-visual	30.32	30.32	30.32	30.32	30.32	30.32	30.32	30.32	30.32	30.32	30.32	30.32
Professional fees	38.09	38.09	38.09	38.09	38.09	38.09	38.09	38.09	38.09	38.09	38.09	38.09
Sub-total client direct	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**	**102.13**
Total	**510.42**	**587.69**	**261.69**	**845.72**	**562.65**	**428.75**	**501.32**	**613.59**	**392.06**	**764.61**	**383.74**	**375.27**

Spotlight location data: Toronto US$/ft²

Low spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	7	-
Millwork	9	16	-	11	5	1	4	10	6	16	0	11
Architectural metal and glass	-	-	2	59	33	18	28	-	2	6	0	-
Ceiling, carpentry, partitions and wall covering	15	12	-	100	52	24	19	12	40	12	16	17
Access floors and finishes	27	27	-	28	28	28	28	28	28	12	29	29
Appliances and toilet accessories	1	3	-	-	0	0	0	0	0	51	0	4
Services	51	51	51	51	51	51	51	51	51	97	51	51
Data & security	6	6	6	6	6	6	6	6	6	6	6	6
General conditions, fee and insurance	14	14	7	33	22	16	17	13	17	25	14	15
Sub-total construction	**122**	**129**	**66**	**289**	**197**	**145**	**153**	**120**	**149**	**225**	**124**	**132**
Loose furniture	40	40	40	40	40	40	40	40	40	40	40	40
Audio-visual	12	12	12	12	12	12	12	12	12	12	12	12
Professional fees	9	9	9	9	9	9	9	9	9	9	9	9
Sub-total client direct	**61**	**61**	**61**	**61**	**61**	**61**	**61**	**61**	**61**	**61**	**61**	**61**
Total	**183**	**190**	**126**	**350**	**258**	**206**	**214**	**181**	**210**	**285**	**185**	**193**

Medium spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	8	-
Millwork	14	37	-	36	5	2	10	22	6	16	6	12
Architectural metal and glass	-	-	2	88	51	29	44	-	2	6	0	-
Ceiling, carpentry, partitions and wall covering	30	12	-	138	67	40	37	17	60	33	17	17
Access floors and finishes	35	35	-	31	30	30	28	28	30	15	30	30
Appliances and toilet accessories	1	4	-	-	0	0	1	0	0	67	0	4
Services	65	65	65	65	65	65	65	65	65	122	65	65
Data & security	8	8	8	8	8	8	8	8	8	8	8	8
General conditions, fee and insurance	19	20	9	47	29	22	24	18	22	34	17	17
Sub-total construction	**173**	**183**	**84**	**412**	**255**	**196**	**218**	**159**	**193**	**302**	**151**	**153**
Loose furniture	45	45	45	45	45	45	45	45	45	45	45	45
Audio-visual	15	15	15	15	15	15	15	15	15	15	15	15
Professional fees	12	12	12	12	12	12	12	12	12	12	12	12
Sub-total client direct	**72**	**72**	**72**	**72**	**72**	**72**	**72**	**72**	**72**	**72**	**72**	**72**
Total	**245**	**254**	**156**	**484**	**326**	**268**	**290**	**230**	**265**	**374**	**223**	**225**

High Spec (US$/ft²)

Element	Business / Welcome lounge	Staff breakout / Dining / Tea point	Collaboration	Quiet rooms	Meeting rooms	Boardroom	Executive suite	Contemplation / Parents room	Training facilities	WC's	Open plan	Comms / IT build and store / Copy print / Lockers / Store
Monumental stair	-	-	-	-	-	-	-	-	-	-	8	-
Millwork	21	57	-	57	9	3	16	141	7	31	15	15
Architectural metal and glass	-	-	2	107	64	39	57	-	2	7	0	-
Ceiling, carpentry, partitions and wall covering	91	40	-	171	86	68	74	75	91	63	38	23
Access floors and finishes	43	47	-	34	33	33	29	31	33	16	31	30
Appliances and toilet accessories	1	6	-	-	0	0	1	1	0	42	0	6
Services	76	76	76	76	76	76	76	76	76	138	76	76
Data & security	9	9	9	9	9	9	9	9	9	9	9	9
General conditions, fee and insurance	31	30	10	58	35	29	33	42	28	39	22	20
Sub-total construction	**272**	**265**	**97**	**512**	**313**	**256**	**295**	**375**	**247**	**346**	**200**	**180**
Loose furniture	50	50	50	50	50	50	50	50	50	50	50	50
Audio-visual	17	17	17	17	17	17	17	17	17	17	17	17
Professional fees	15	15	15	15	15	15	15	15	15	15	15	15
Sub-total client direct	**82**	**82**	**82**	**82**	**82**	**82**	**82**	**82**	**82**	**82**	**82**	**82**
Total	**355**	**347**	**180**	**594**	**395**	**339**	**378**	**458**	**329**	**428**	**282**	**263**

Market intelligence

Reports




UK market intelligence



Germany market intelligence



US market intelligence

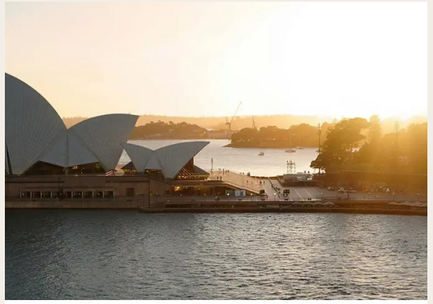

Australia and New Zealand market intelligence

Projects



Five Bank Street, UK



Shell's Energy Transistion Campus, The Netherlands



Pinsent Masons' Crossover fit-out, The Netherlands



Philips Bangalore Innovation Hub relocates



Google Thompson Centre, US



Salesforce Dubai office, UAE

Key contacts

Report leads







Key contacts
















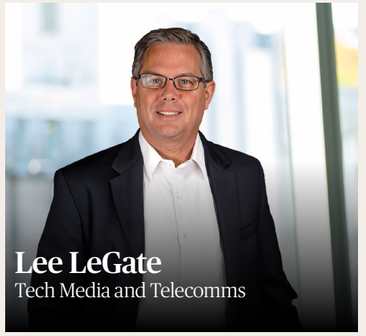







Turner & Townsend is a global professional services company with over 22,000 people in more than 60 countries.

Working with our clients across real estate, infrastructure, energy and natural resources, we transform together delivering outcomes that improve people's lives. Working in partnership makes it possible to deliver the world's most impactful projects and programmes as we turn challenge into opportunity and complexity into success.

Our capabilities include programme, project, cost, asset and commercial management, controls and performance, procurement and supply chain, net zero and digital solutions.

We are majority-owned by CBRE Group, Inc., the world's largest commercial real estate services and investment firm, with our partners holding a significant minority interest. Turner & Townsend and CBRE work together to provide clients with the premier programme, project and cost management offering in markets around the world.

www.turnerandtownsend.com

© Turner & Townsend Limited. This content is for general information purposes only and does not purport to constitute professional advice. We do not make any representation or give any warranty, express or implied, and shall not be liable for any losses or damages whatsoever, arising from reliance on information contained in this document. It must not be made available or copied or otherwise quoted or referred to in whole or in part in any way, including orally, to any other party without our express written permission and we accept no liability of whatsoever nature for any use by any other party.